
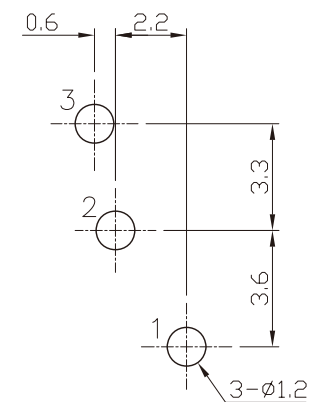
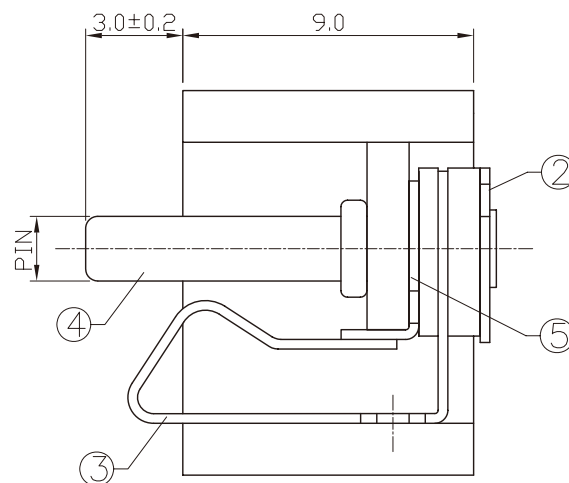


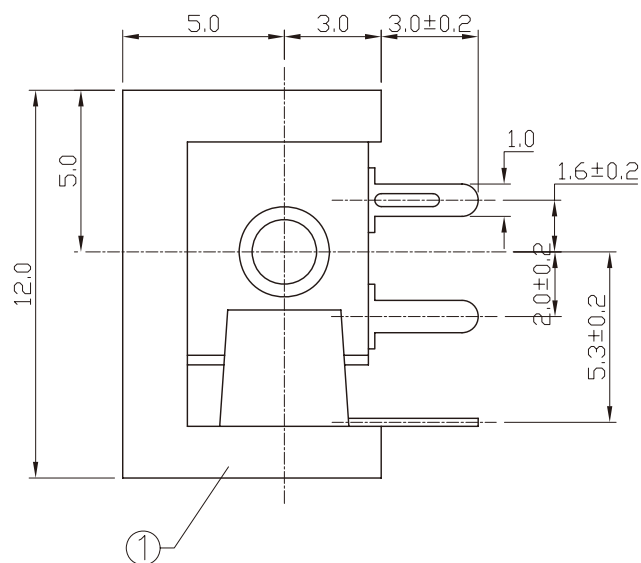

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

CAT. NO.	PIN	SCHEMATIC
DCJ-R60-20	$\phi 2.0$	
DCJ-R60-25	$\phi 2.5$	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

5	CURVE PIECE	1	H62 BRASS	MB:Cu Cu/Sn PLATED
4	PIN	1	H59 BRASS	MB:Cu Ni PLATED
3	SPRING PIECE	1	SUS301	MB:Cu Cu/Sn PLATED
2	FLAT PIECE	1	H62 BRASS	MB:Cu Cu/Sn PLATED
1	HOUSING	1	PBT	
LTR	PART NAME	QTY	MATERIAL	REMARK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PJECTION






ORDER INFORMATION

DCJ-R60-xx-LF

SERIES | LEADFREE
20:2.00
25:2.50
PIN TO PIN 6.9mm
DIP 90°

DESCRIPTION: DC POWER JACK

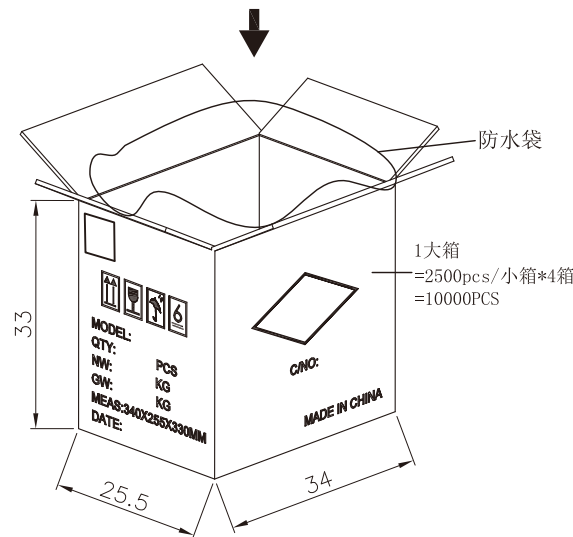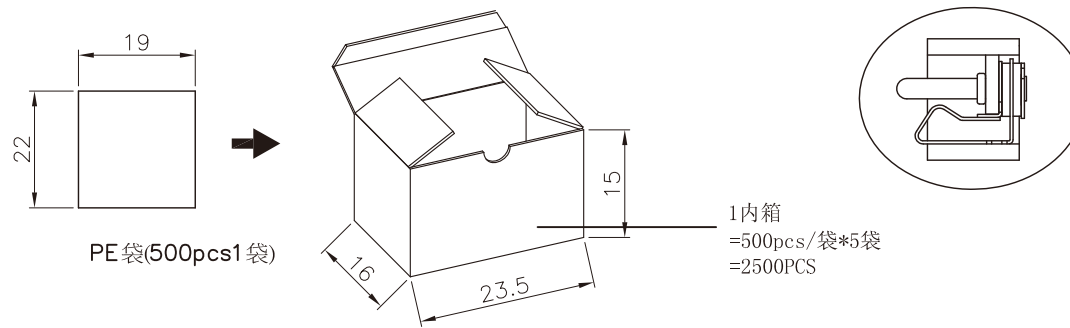

Qty.	10000 Pcs
Weight/Pcs	1.410g
N. W. /CTN	14.10kg
G. W. /CTN	15.38kg

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

DCJ-R60-xx-LF

SERIES

DIP 90°

PIN TO PIN 6.9mm

LEADFREE

DESCRIPTION: DC POWER JACK