


## Specifications

- \* Current rating: 3A AC, DC
- \* Voltage rating: 250V AC, DC
- \* Temperature range: -25°C~+85°C
- \* Insulation resistance: 1,000MΩ min.
- \* Withstand voltage: 1,000V AC/minute

- \* Poles:2-20
- \* Material:NYLON 66 UL 94V-2
- Color: HENNA

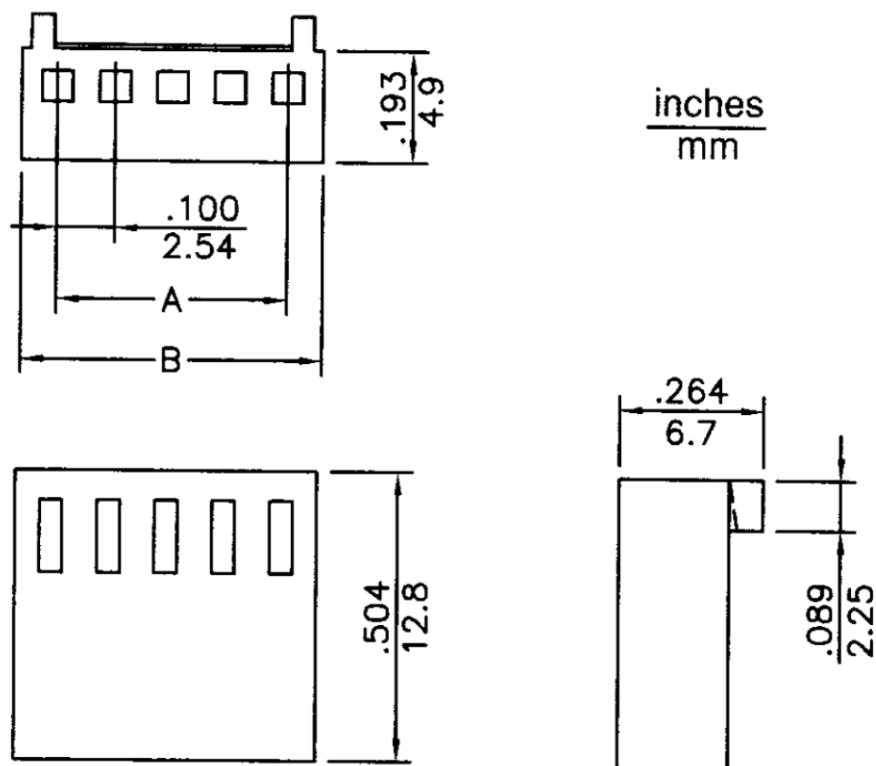

| CIRCUITS | DIMENSION in.(mm) |              |
|----------|-------------------|--------------|
|          | A                 | B            |
| 2        | 0.100(2.54)       | 0.222(5.65)  |
| 3        | 0.200(5.08)       | 0.322(8.19)  |
| 4        | 0.300(7.62)       | 0.422(10.73) |
| 5        | 0.400(10.16)      | 0.522(13.27) |
| 6        | 0.500(12.70)      | 0.622(15.81) |
| 7        | 0.600(15.24)      | 0.722(18.32) |
| 8        | 0.700(17.78)      | 0.822(20.89) |
| 9        | 0.800(20.32)      | 0.922(23.43) |
| 10       | 0.900(22.86)      | 1.022(25.97) |
| 11       | 1.000(25.40)      | 1.122(28.51) |
| 12       | 1.100(27.94)      | 1.222(31.05) |
| 13       | 1.200(30.48)      | 1.322(33.59) |
| 14       | 1.300(33.02)      | 1.422(36.13) |
| 15       | 1.400(35.56)      | 1.522(38.67) |
| 16       | 1.500(38.10)      | 1.622(41.21) |
| 17       | 1.600(40.64)      | 1.722(43.75) |
| 18       | 1.700(43.18)      | 1.800(46.29) |
| 19       | 1.800(45.72)      | 1.922(48.83) |
| 20       | 1.900(48.26)      | 2.022(51.37) |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±  
X, ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

MKL-H-xx-LF  
SERIES | LEADFREE  
02~20 WAY  
HOUSING

DESCRIPTION:

www.morethanall.com