


T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-top view)

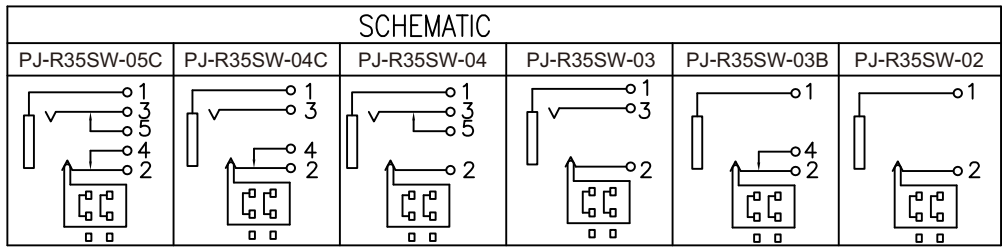

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3


LTR	PART NAME	QTY	MATERIAL	REMARK
10	8# CONTACT FOOT	6	C2680	MB:Cu Ag PLATED
9	SWITCH COVER	1	PA66	
8	SWITCH	1	PBT 4815	
7	HOUSING	1	PA66	
6	AXIS SUPPORT	1	C2680	MB:Cu Ni PLATED
5	5# SHUNT TERMINAL	1	C2680 t=0.40	MB:Cu Sn PLATED
4	4# SHUNT TERMINAL	1	C2680 t=0.40	MB:Cu Sn PLATED
3	3# RING SPRING	1	C5191 t=0.25	MB:Cu Sn PLATED
2	2# TIP SPRING	1	SUS301 t=0.25	MB:Cu Ag PLATED
1	1# EARTH TERMINAL	1	C2680 t=0.50	MB:Cu Sn PLATED

RoHS Compliant


TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY	CY	X.±
CHECKED BY	GENIUS	.X±
UNIT/mm	SCALE 1:1	.XX±
DATE		.XXX±
SIZE A4	PJECTION	ANG±



ORDER INFORMATION

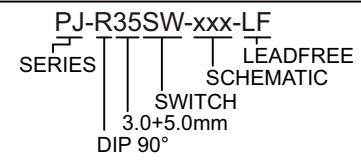

DESCRIPTION: MINIATURE JACK