


CAT. NO.	PIN	SCHEMATIC
DCJ-DPAHN-25	Ø2.5	

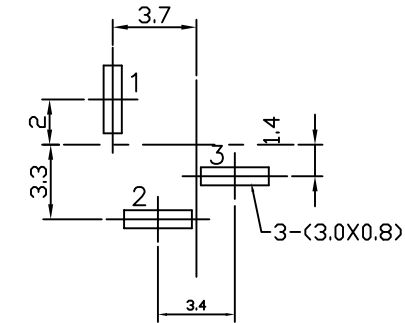

T:1.6 Dimensions of PC board holes
Tolerance : ±0.05(Printed-top view)

7	NUT	1	H59(COPPER ALLOY)	Cu/Sn PLATED
6	COVER	1	PF	
5	CONTACT FOOT	1	C2680	Sn PLATED
4	PIN	1	C2680	Ni PLATED
3	SPRING	1	C5191	Sn PLATED
2	FLAT PIECE	1	C2680	Sn PLATED
1	HOUSING	1	PBT 4815	UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

P PROJECTION



ORDER INFORMATION

DCJ-DPAHN-25-LF
SERIES | | | | LEADFREE
| | | | 2.5 DIA
DIP 180° | | | | NUT
| | | | H TYPE
| | | | PANEL FRONT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: DC POWER JACK