







Note:

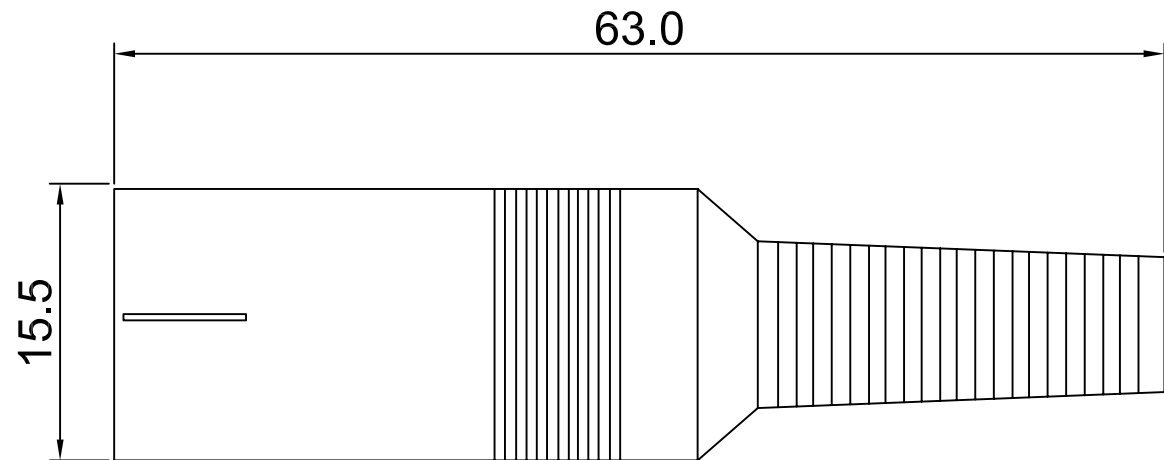
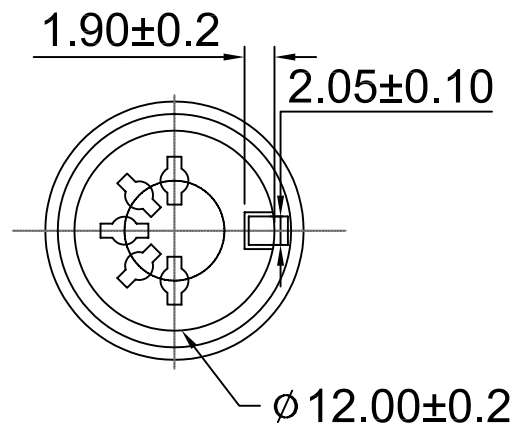
1.Material:

- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.60mm
- 1.3 Shell: Spcc,t=0.40mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min.
- 2.5 Total mating force: 5.5 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -55°C~85°C

| NO.OF CONTACT | 3(180°)                                                                             | 4(210°)                                                                             | 5(180°)                                                                             | 6(240°)                                                                             | 7(270°)                                                                             | 8(270°)                                                                             |
|---------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| PART NO.      | DA-S-03                                                                             | DA-S-04                                                                             | DA-S-05                                                                             | DA-S-06                                                                             | DA-S-07                                                                             | DA-S-08                                                                             |
| POSTTION      |  |  |  |  |  |  |



**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ±

PPOJECTION 



ORDER INFORMATION

DA-S-xx-LF  
SERIES | LEADFREE  
03~08 WAY  
FEMALE

DESCRIPTION: DIN (F) ASSEMBLY