
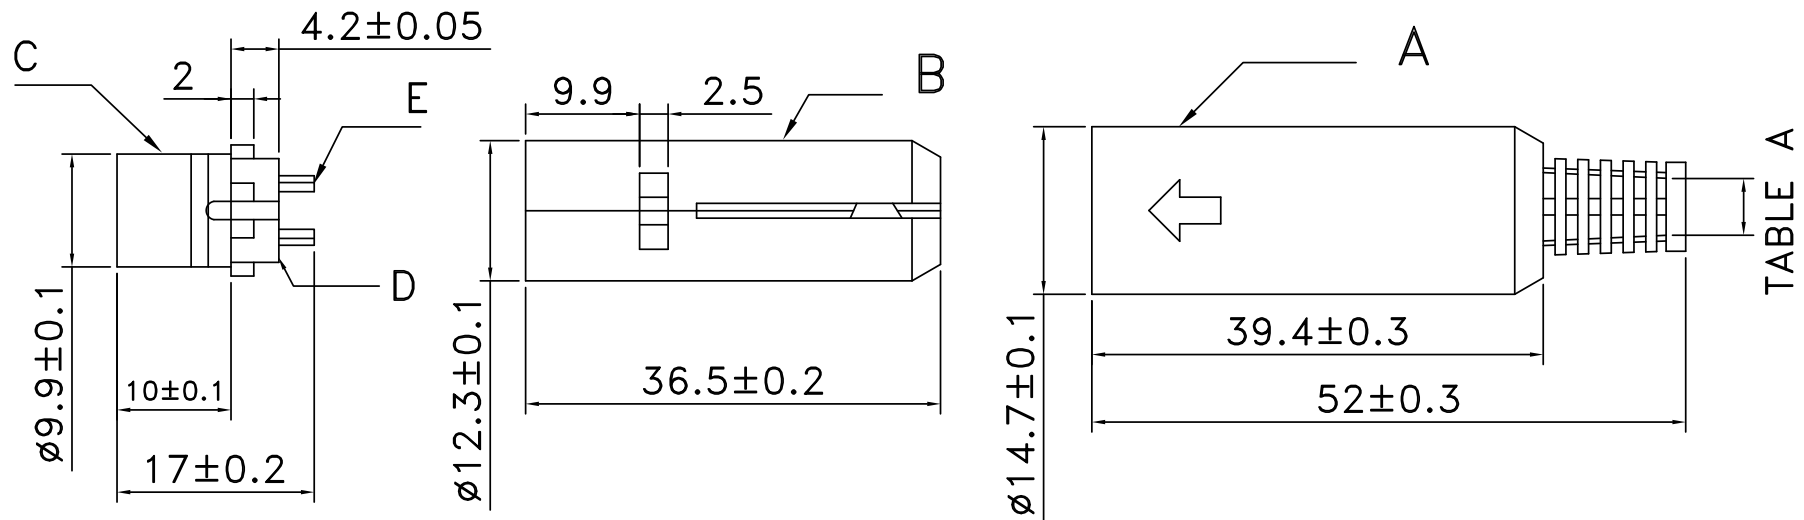


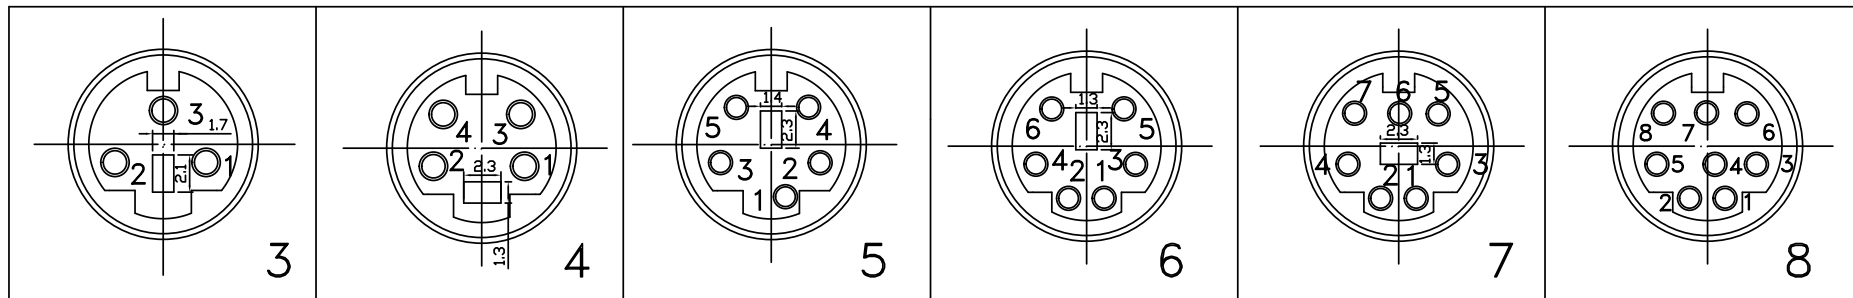

MATERIALS:

A. BOOT: EVA + 2L
 B. MIDDLE HOOD: ABS
 C. METAL SHELL:
 COPPER NICKEL PLATED
 D. INSULATOR: NYLON6+GF
 E. PIN CONTACT:
 BRASS SILVER PLATED

SPECIFICATIONS:

1. RATION: 100V AC 1A MAX or 12V DC 2A MAX.
2. INSULATION RESISTANCE: 50M OHM MIN at 250V DC.
3. DIELECTRIC STRENGTH: 250 V AC / 1 MINUTE.
4. CONTACT RESISTANCE: 30M OHM MAX.
5. INSERTION FORCE: 4.5KG MAX.
6. WITHDRAWAL FORCE: 0.9KG ~ 3KG.
7. OPERATING TEMPERATURE: -20°C ~ 85°C

7.0	BACK SHELL
6.0	BACK SHELL
5.0	BACK SHELL (STANDARD)
	COVER DIM.

TABLE A

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION



ORDER INFORMATION

MDA-S-xx-LF
 SERIES | LEADFREE
 03-08 WAY
 FEMALE

DESCRIPTION: MINI DIN JACK ASSY