

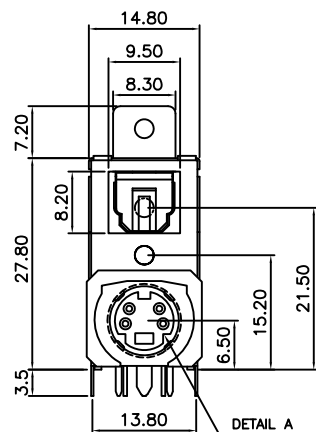





TRANSMITTER	
V _{in}	①
V _{cc}	②
GND	③

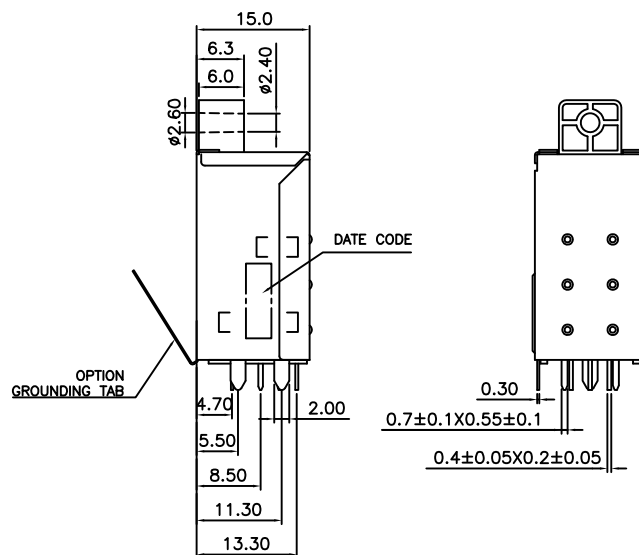

- NOTES:
- MATERIAL:
 HOUSING: THERMOPLASTIC, W/15% G/F, UL94 V-0, BLACK COLR
 BOTTOM COVER: THERMOPLASTIC, W/30% G/F UL94 V-0, BLACK COLOR
 RETAINER: THERMOPLASTIC, W/15% G/F, UL94 V-0, BLACK COLR
 SHUTTER: THERMOPLASTIC, W/15% G/F, UL94 V-0, BLACK COLR
 CONTACTS: PHOSPHOR BRONZE
 FRONT SHIELD: BRASS
 BACK SHIELD: BRASS
 COIL SPRING: STAINLESS STEEL
 GROUVDING TAB: STAINLESS STEEL
 DRIVE IC(TRANSMITTER)/TX
 DRIVE IC LEAD FRAME: PHOSPHOR BRONZE
 - FINISH:
 CONTACT:
 GOLD FLASH PLATING ON CONTACT AREA.
 100μ" MIN. BRIGHT TIN PLATING ON SOLDER TAIL AREA,
 50μ" MIN. NICKEL UNDERPLATING OVERALL.
 BACK SHIELD:
 100μ" MIN. NICKEL PLATING CN ENTIRE
 50μ" MIN. Cu UNDERPLATING OVERALL
 FRONT SHIELD:
 100μ" MIN. TIN PLATING ON ENTIRE
 50μ" MIN. NICKEL UNDERPLATING OVERALL
 LEADFRAME:
 100μ" MIN. TIN PLATING ON ENTIRE
 50μ" MIN. NICKEL UNDERPLATING OVERALL
 - RECOMMENDED PCB THICKNESS: 1.6mm

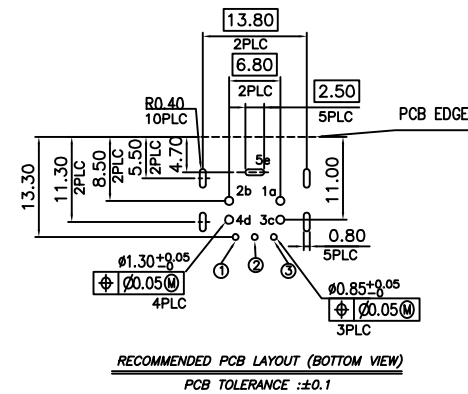

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

POFMD-FTHS-0304-LF

SERIES

LEADFREE


03 TO 04 WAY

SPRING


TOP HOLE

FEMALE


DESCRIPTION: MINI DIN 4 POS. WITH SPDIF CONNECT

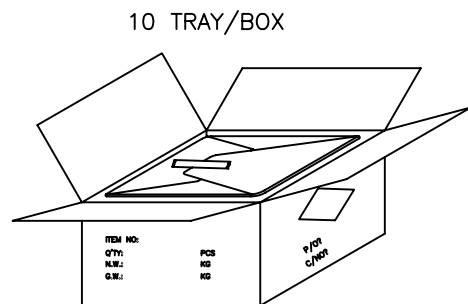


SHOPPING CARTON



100PCS/TRAY

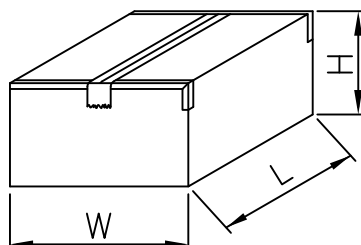

SHOPPING CARTON



10 TRAY

NOTES:

1. PACKAGE DIMENSION :
 - a. TRAY:(L)353*(W)275*(H)24
 - b. SHOPPING CARTON:(L)370*(W)290*(H)265
2. PACKAGE MATERIAL:
 - a. TRAY:PS
 - b. COVER:PS
3. PACKAGE DETAIL:
 - a. 100 PCS/TRAY
 - b. 10 TRAYS/SHOPPING CARTON(1,000 PCS)
4. WEIGHT DETAIL:
 - a. NET Wt=10.2kg
 - b. GROSS Wt=11.7kg

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

POFMD-FTHS-0304-LF

SERIES

LEADFREE
03 TO 04 WAY
SPRING
TOP HOLE
FEMALE

DESCRIPTION: MINI DIN 4 POS. WITH SPDIF CONNECT