
3P	4P	5P 180°	5P 240°	5P 360°	6P	7P	8P 270°	8P 262°
DASM-JS-03	DASM-JS-04	DASM-JS-05	DASM-JS-05B	DASM-JS-05C	DASM-JS-06	DASM-JS-07	DASM-JS-08	DASM-JS-08B

MATERIAL

SHELL: ZINC NICKEL PLATED

PIN: BRONZE, SILVER PLATED

HOUSING: BAKELITE.

GROUND PIN: BRONZE NICKEL PLATED.

SPECIFICATION

Rating: 100V AC 1A max.

Contact Resistance:

Pins 30m OHM max.



Shell 50m OHM max.

Insulation Resistance

100M OHM at 500V DC min.

Voltage Withstand:

250V AC for 1 minute

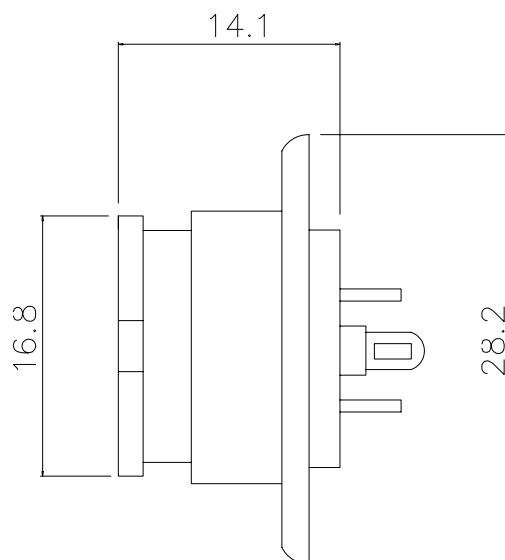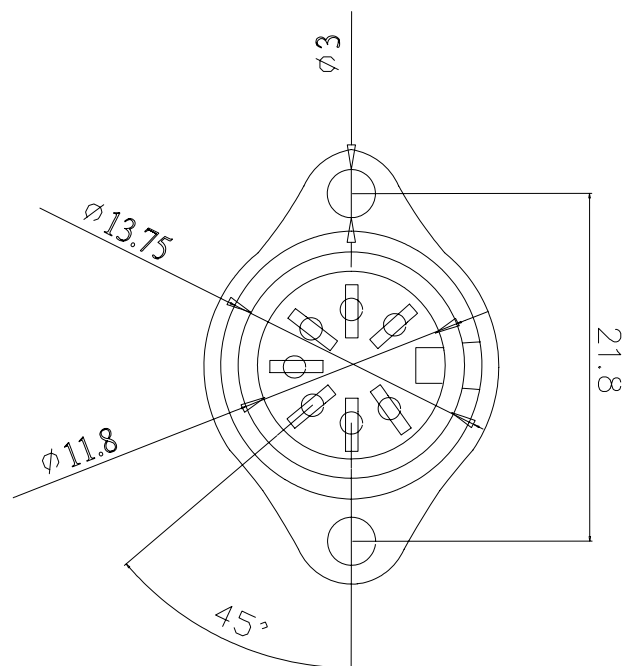

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

DASM-JS-xx-LF

SERIES

LEADFREE

03~08 WAY

SOLDER

FEMALE

DESCRIPTION: