
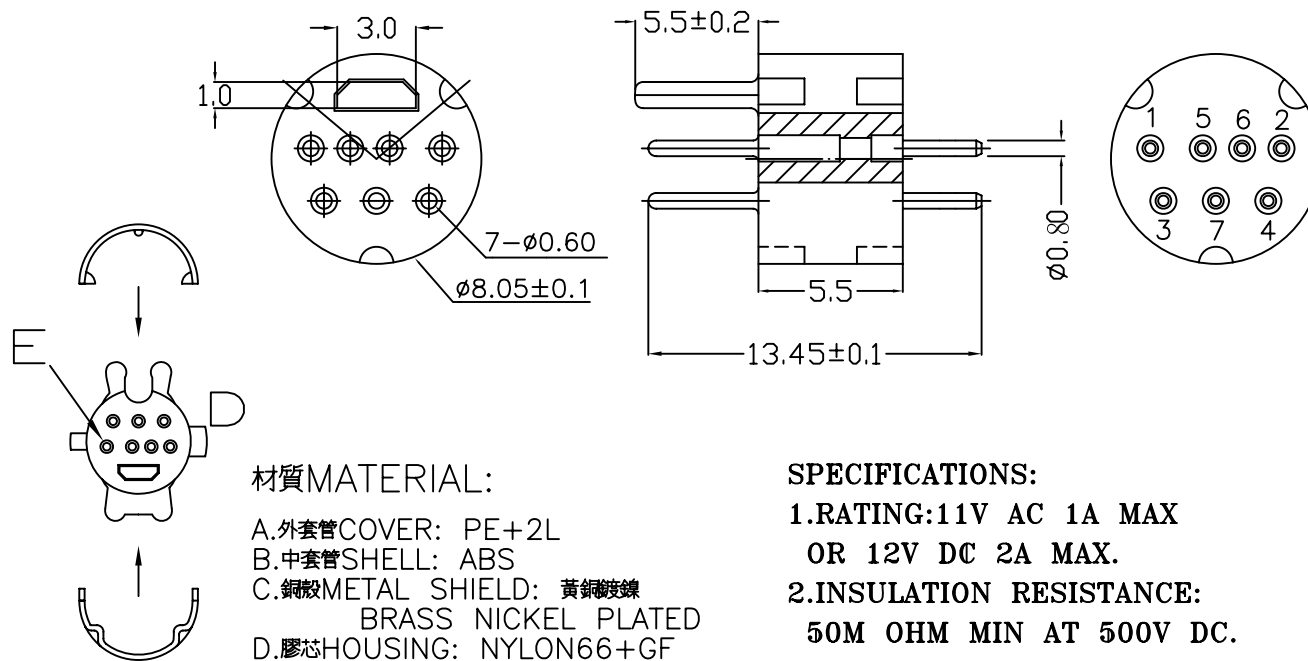


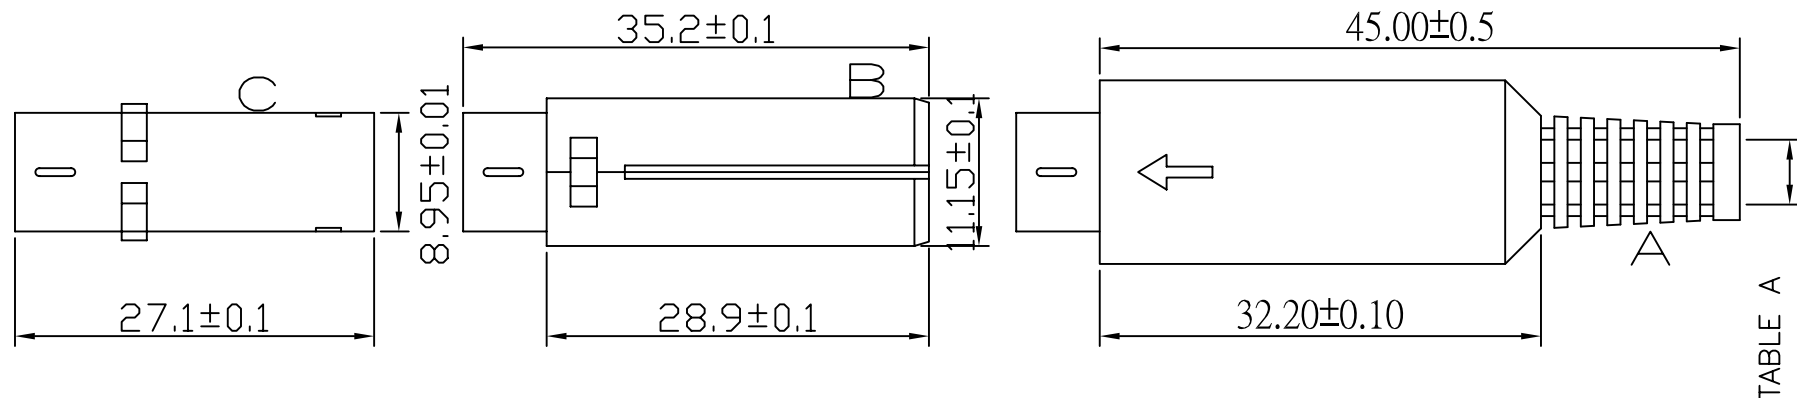

	7.0ø BACK SHELL
	6.0ø BACK SHELL
⊗	5.0ø BACK SHELL (STANDARD)
	COVER DIM.

TABLE A

材質 MATERIAL:

- A. 外套管 COVER: PE+2L
 B. 中套管 SHELL: ABS
 C. 銅殼 METAL SHIELD: 黃銅鍍銀
 BRASS NICKEL PLATED
 D. 膠芯 HOUSING: NYLON66+GF
 E. 針 CONTACT: 黃銅鍍銀
 BRASS GOLD FLISH PLATED

SPECIFICATIONS:

1. RATING: 11V AC 1A MAX
 OR 12V DC 2A MAX.
 2. INSULATION RESISTANCE:
 50M OHM MIN AT 500V DC.
 3. DIELECTRIC STRENGTH:
 500V AC / 1 MINUTE.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

MDA-P-07B-LF
 SERIES | | LEADFREE
 | | B KEY
 | 07 WAY
 MALE

DESCRIPTION: