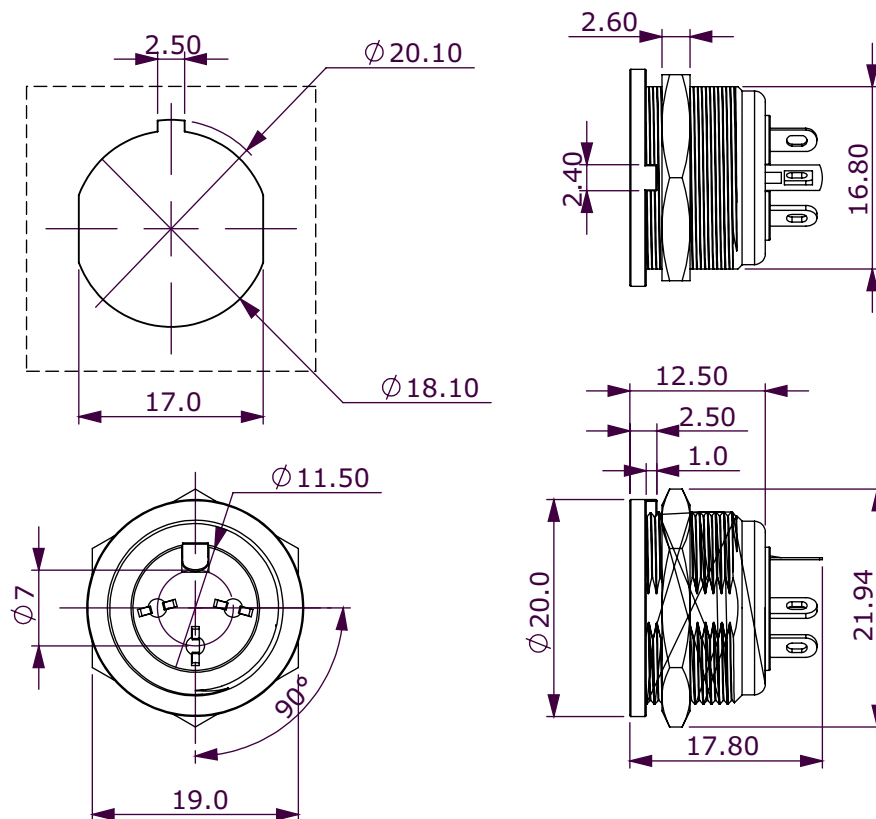


5	TERMINALS	Brass	Silver Ptd.	3
4	3P HOUSING	PA66		1
3	SCREW NUT	Brass	Nickel Ptd.	1
2	NEGATIVE CONTACT	Copper	Nickel Ptd.	1
1	COVER	Zn Alloy	Nickel Ptd.	1
No.	Description	Material	Treat	Q'ty

Specifications

rating :
 100V AC 4A MAX
 contact resistance :
 pins-30mΩ MAX; shell-50mΩ MAX
 insulation resistance :
 MIN 100 MEGΩ @500V DC
 voltage withstand :
 250V AC R.M.S. for 1 minute

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

DAMS-JS-03-LF

SERIES | LEADFREE
 03 WAY
 SOLDER
 JACK

DESCRIPTION: DIN 3P SCREW LOCKING SOCKET PANEL MOUNT