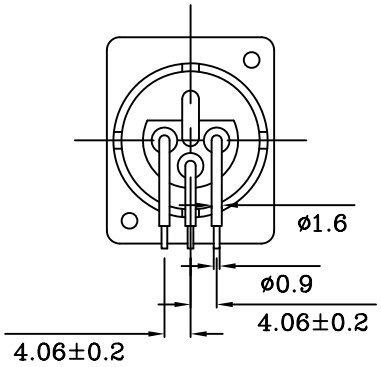

P.C.B LAYOUT (±0.2)
(BOTTOM VIEW)

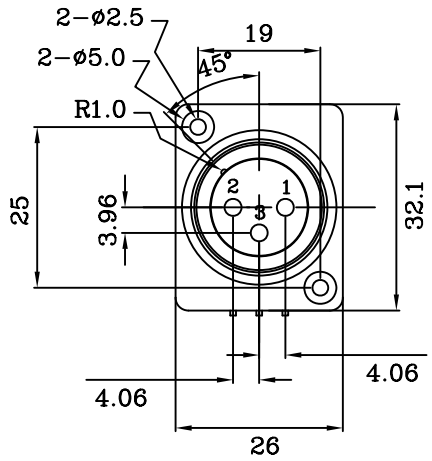

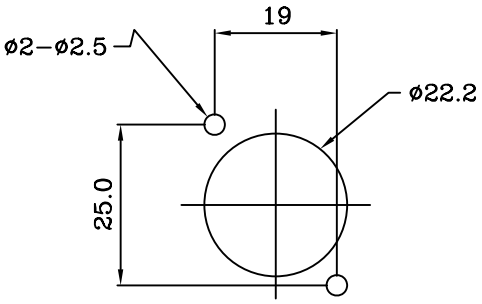

PANEL CUT OUT
(FRONT SIDE)

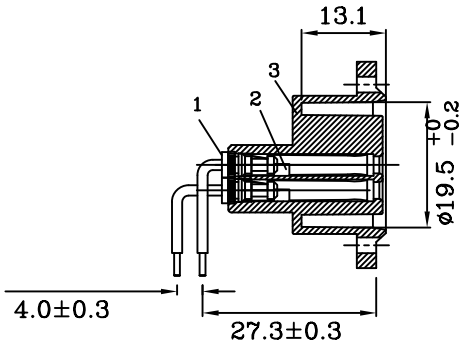

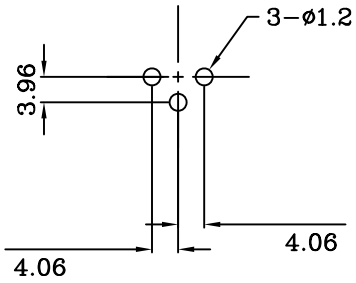

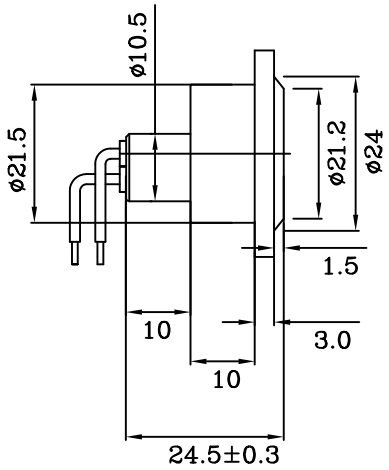

3	PA66-54HB/G30-BLACK
2	BRASS-Silver/Gold Plated
1	BRASS-Tin/Gold Plated
	MATERIAL

Specification
Contact resistance:<5mΩ
Insulation resistance:1GΩ
Delectric strength:1500Vdc
Insertion/withdrawal force:<20N
Life time(mating cycles):>1000
Temperature range:-30°C TO +80°C

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MIC-SRPQx-03-LF

- SERIES
- FEMALE / DIP 90°
- PANEL / SQUARE
- G:GOLD / BLANK:SILVER
- 03 WAY
- LEADFREE

DESCRIPTION: