

SPECIFICATIONS:




CONTACT RESISTANCE—<3MΩ

INSULATION RESISTANCE—>1GΩ

DIELECTRIC STRENGTH—1500V/DC

LIFE TIME(MATING CYCLES)>1000

7	PVC—BLACK
6	POM—BLACK
5	POM—BLACK
4	BRASS—NICKEL PLATED
3	ZINC
2	PBT—BLACK
1	BRASS
	MATERIAL

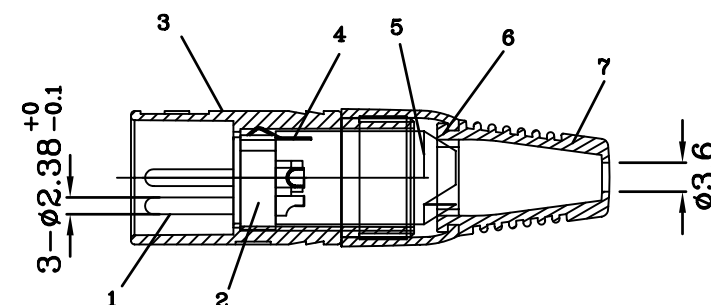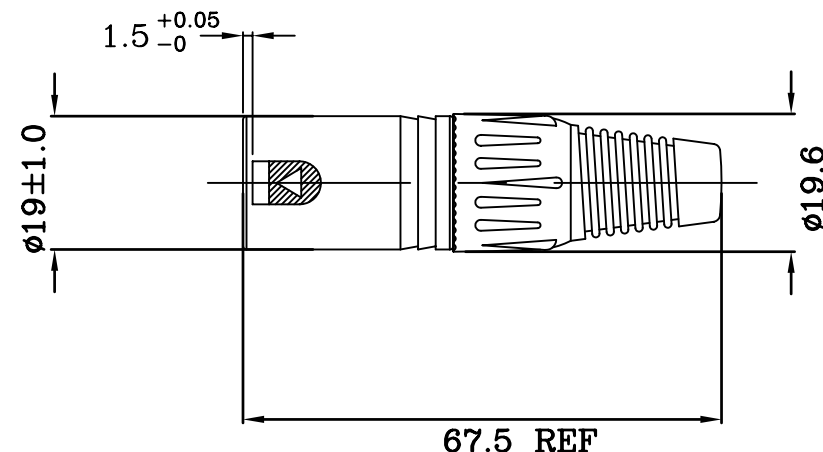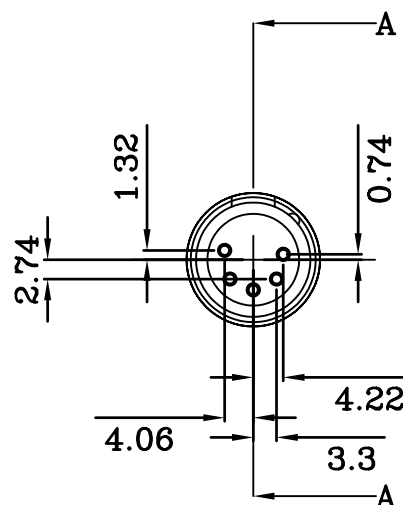

A-A SECTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MIC-PA-05-LF

SERIES | LEADFREE
05 WAY
ASSEMBLY
MALE

DESCRIPTION: