

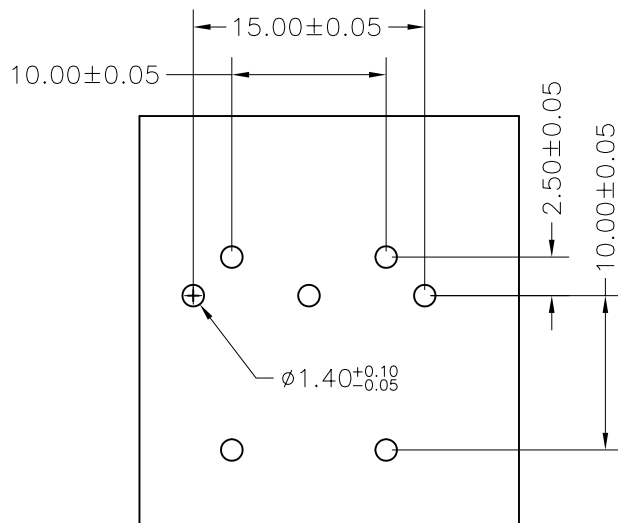
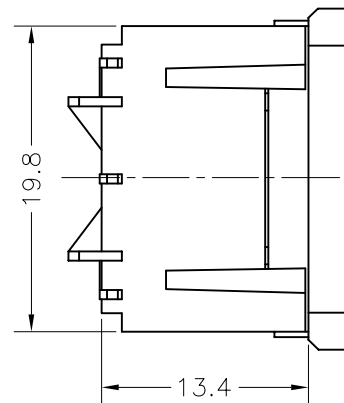
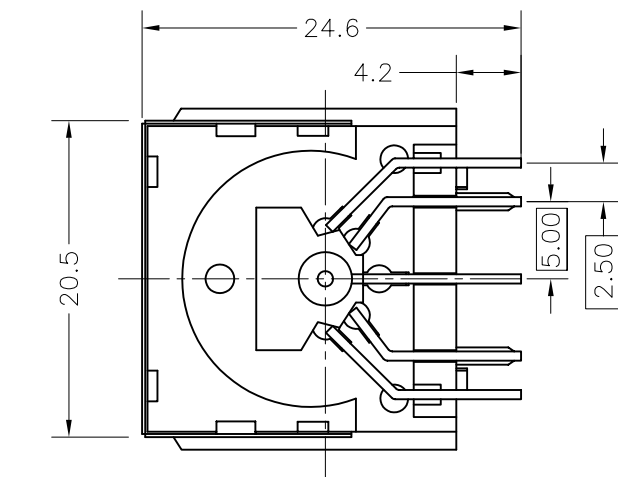


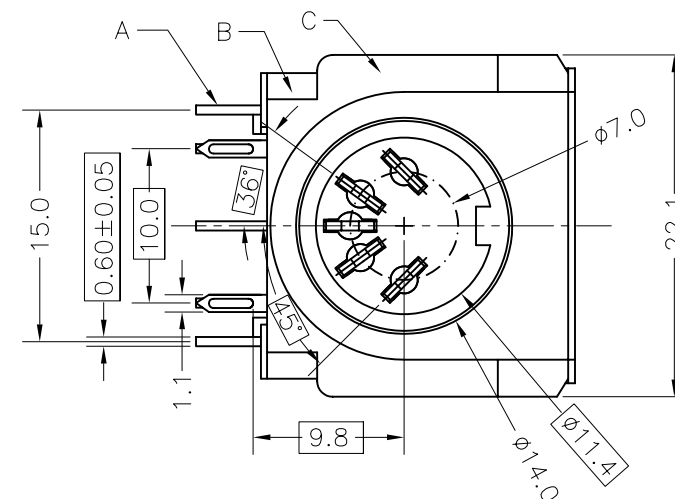

RECOMMEND P.C.BOARD LAYOUT

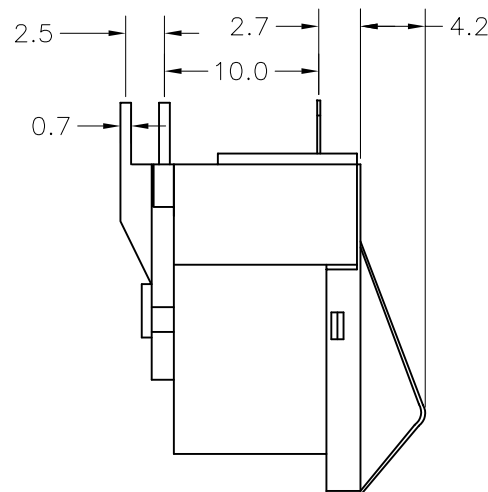

NOTES:

1.MATERIALS

- 1.1 Insulator:PBT+30% Glass Fiber UL94V-0
- 1.2 Contact: Brass, Tin Plated Or Gold Plated
- 1.3 Spring Tole: SUS304#
- 1.4 Shell: Brass,Nickel Plated Or Gold Plated

2.SPECIFICATIONS

- 2.1 Current Rating: 1Amp
- 2.2 Dielectric Strength: AC 1000V/min.R.M.S.
- 2.3 Insulator Resistance: 5000M Ω Min. at 500V DC
- 2.4 Contact Resistance: 30m Ω Max
- 2.5 Operation Temperature: -55°C to +105°C

3.重點尺寸標示XX

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

DJ-MS-05-LF
SERIES | T | LEADFREE
| 05 WAY
| SPRING
| METAL

DESCRIPTION: 5P黑鍍線方孔 魚叉式貼壁彈片(端子錫, 底座鍍)RoHS