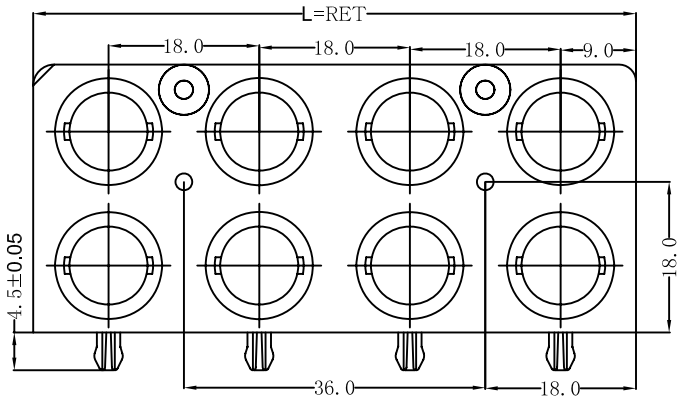

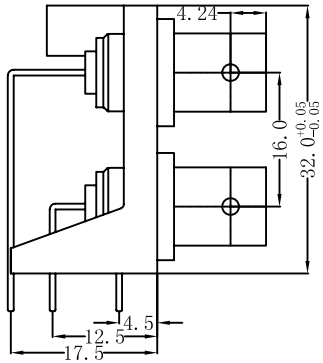



1: MATERIALS:
a: BOOY:ZINC ALLOY.DIE CASTIN NIXKEL PLATED
b: CONTACT:BARS NICKEL FLATED
c: BRACKET:A.B.S. UL 94HB
d: INSULATOR: ENGINEER PLASTIC POM VL 94HB
2: NOMIAIAL IMPEDENCE 50(75)OHMS.
3: FREOUENCY RANGE:0-2 GHZ.
4: MAX PEAK VOLTAGE: 500V
5: DIELECTRIC STRENGTH WITHSTAND 1.5KV NNS FOR ONE MINUTE
6: INSULATION RESISTANCE AT 500 VDEC 5000 MEGOHMS MAL.

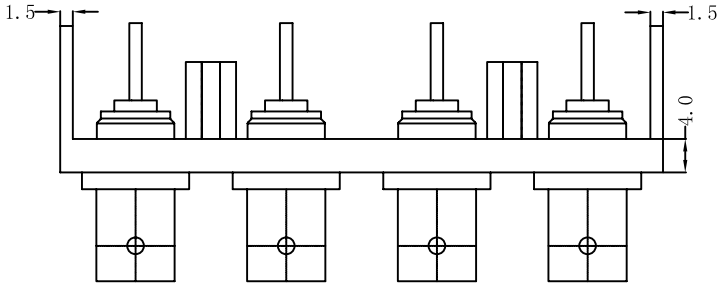

L=RET	
2*1	18.0
2*2	36.0
2*3	54.0
2*4	72.0

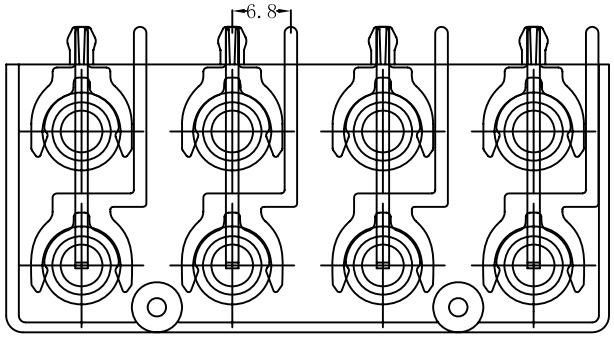

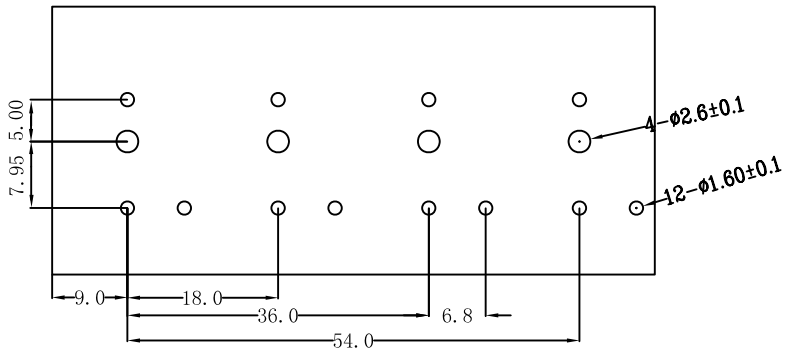

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

BNCBx-JRE2-xx-LF

SERIES
1:1 PORTS
2:2 PORTS
3:3 PORTS
4:4 PORTS
JACK
EAR
DIP 90°
50 OHM
75 OHM
LEADFREE

DESCRIPTION: