


MATERIALS:

- A).HOUSING NYLON 66 + FIBLER
- B).METAL SHELL BRASS NICKEL PLATED
- C).PIN PHOSPHOR BRANZE SILVER PLATED
- D).BODY ABS

SPECIFICATIONS:

- 1.RATION: 100V AC 1A MAX or 12V DC 2A MAX.
2. INSULATION RESISTANCE: 50M OHM MIN at 250V DC.
3. DIELECTRIC STRENGTH: 250 V AC / 1 MINUTE.
4. CONTACT RESISTANCE: 30M OHM MAX.
5. INSERTION FORCE: 4.5KG MAX.
6. WITHDRAWAL FORCE: 0.9KG ~ 3KG.

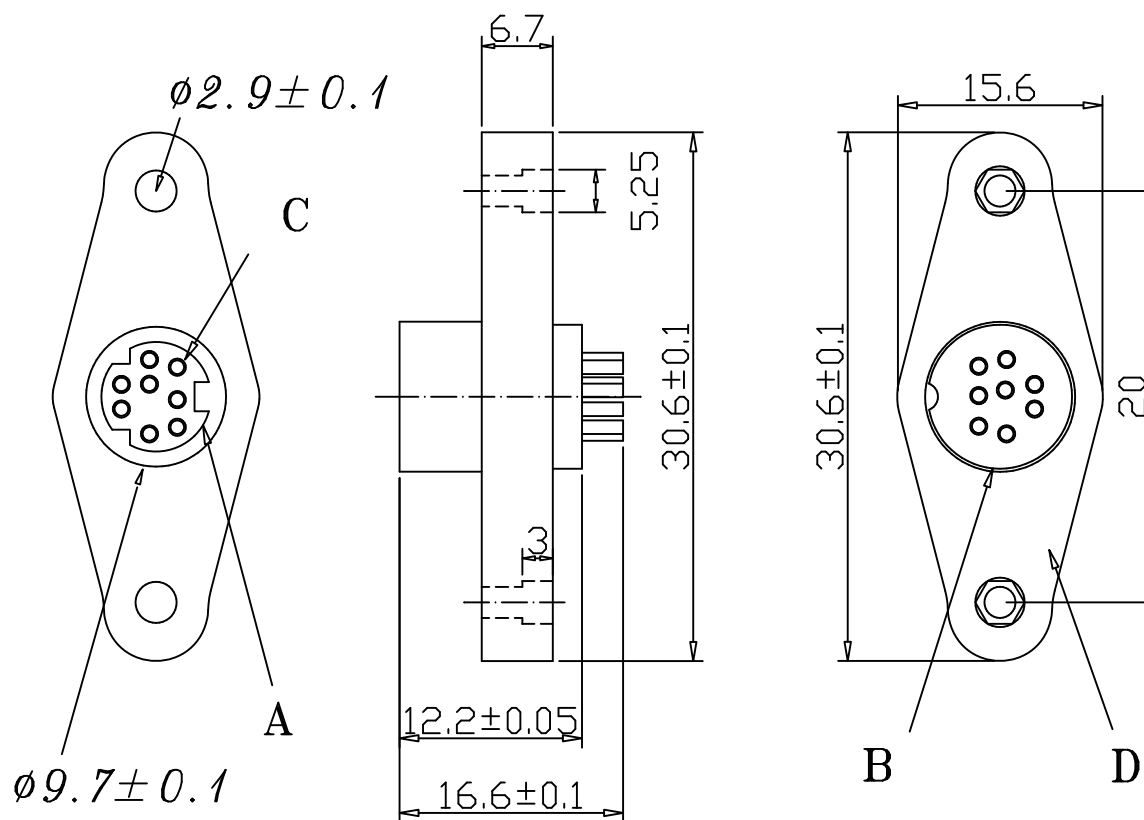

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
X. $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

MDS-SPP-xx-LF
SERIES T T T LEADFREE
03~08WAY
PLASTIC
PANEL
SOCKET

DESCRIPTION: MINI DIN SOCKET PANEL MOUNT PLASTIC