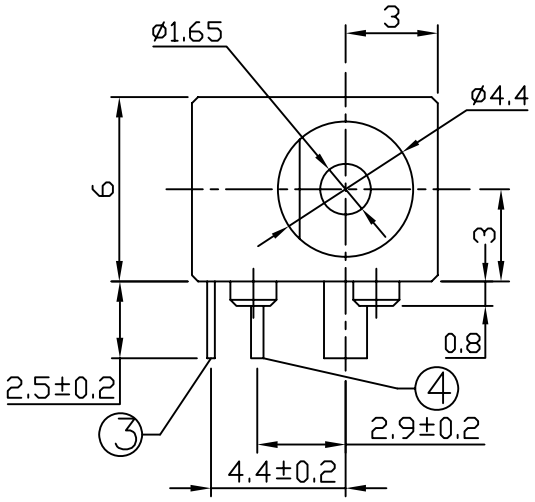

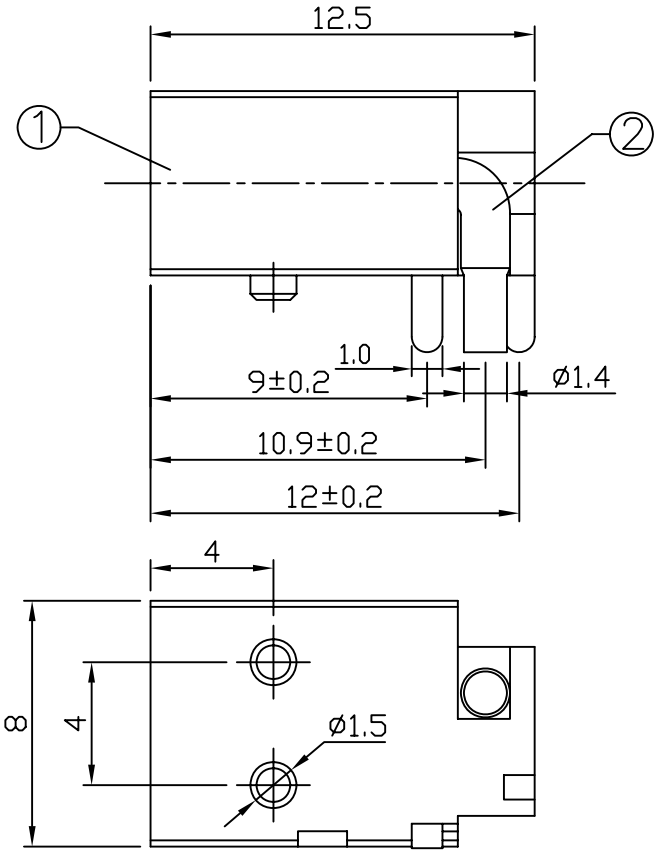

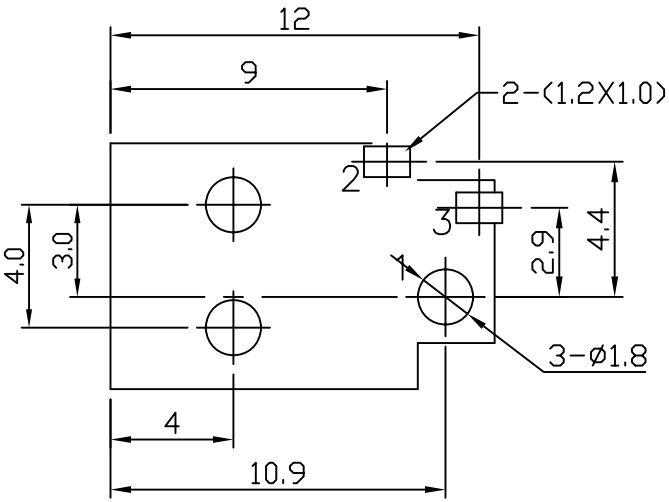

T:1.6 Dimensions of PC board holes

Tolerance : ±0.1(Printed-top view)



UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

LTR	PART NAME	QTY	MATERIAL	REMARK
4	CURVE PIEVE	1	BRASS	MB:Cu Ag PLATED
3	SPRING	1	BRONZE	MB:Cu Ag PLATED
2	PIN	1	H59 BRASS	MB:Cu Cu/Sn PLATED
1	HOUSING	1	PA66/PBT	

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm | SCALE 1 : 1

DATE

SIZE A4 PPOJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DCJ-R40B-165-LF

SERIES | DIP 90° | POST 4.0mm | B TYPE | 1.65Ø | LEADFREE

DESCRIPTION: DC POWER JACK