


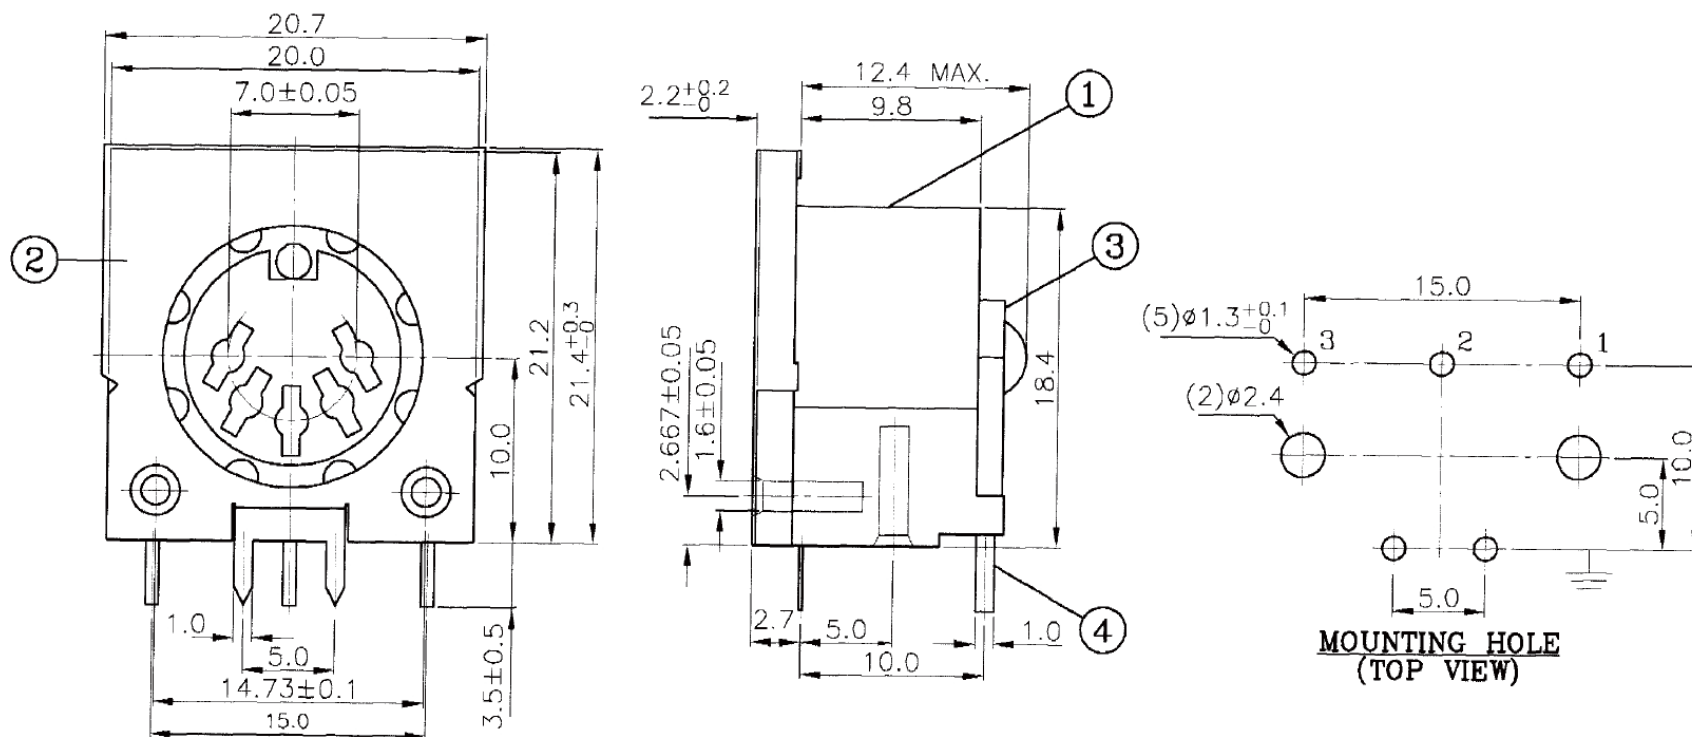

# SPECIFICATIONS:

1. CONTACT RESISTANCE : 20m OHM MAX
2. INSULATION RESISTANCE : 100M OHM AT 500V D.C.
3. VOLTAGE WITHSTANDING : AC 500V 1 MINUTE .
4. INSERTION FORCE : 5.0KG MAX
5. WITHDRAWAL FORCE : 1-3.5 KG
6. LIFE TEST : 5,000 CYCLES MIN. AFTER TESTING, CONTACT RESISTANCE SHALL NOT EXCEED 100m OHM .

未指定尺寸公差為±0.2mm

|     |                  |      |              |               |         |
|-----|------------------|------|--------------|---------------|---------|
| 4.  | CONTACT TERMINAL | 3    | BSR-H/2 0.7t | TIN           |         |
| 3.  | PLATE            | 1    | BAKELITE     | PL-PEM 1.4t   |         |
| 2.  | EARTH TERMINAL   | 1    | PBSR-H 0.2t  | NICKEL PLATED |         |
| 1.  | BODY             | 1    | P.B.T.       |               | UL94V-0 |
| P/N | PART NAME        | Q'TY | MATERIAL     | PLATING       | REMARKS |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



## ORDER INFORMATION

DJ-M5-0503-LF  
SERIES | LEADFREE  
5P3C  
5.0mm  
METAL

DESCRIPTION: