


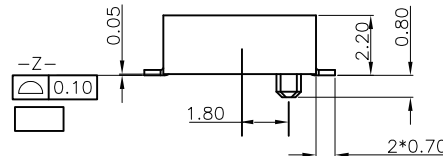


- NOTES:
- MATERIAL:
    - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:NATURAL.
    - CONTACT: COPPER ALLOY
  - FINISH:
    - CONTACT: UNDERPLATING: 50u" MIN. NICKEL OVERALL. FINISH:SEE ORDER INFORMATION.
  - REFLOW SOLDER CAPABLE TO 260°C
  - COPLANARITY 0.1 MM MAX. BASE ON DATUM A

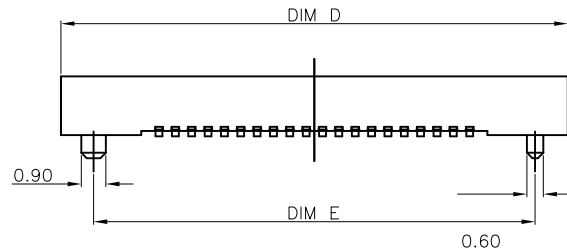

SECTION A-A

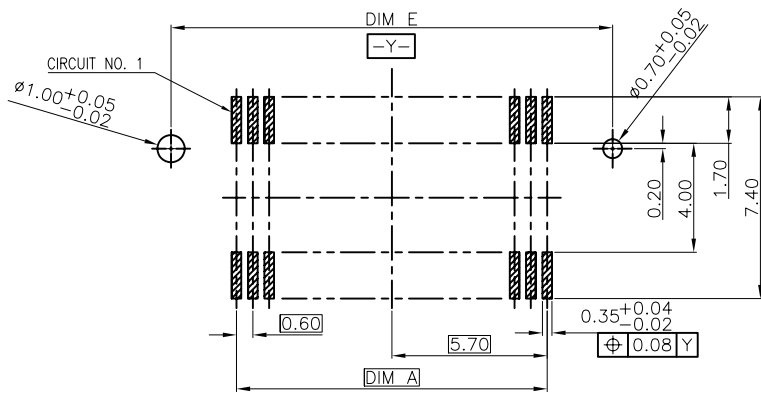

RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE ±0.05

CKT	DimA	DimB	DimC	DimD	DimE
40	11.4	14.8	17.05	18.6	16.2
60	17.4	20.8	23.05	24.6	22.2
80	23.4	26.8	29.05	30.6	28.2
90	26.4	29.8	32.05	33.6	31.2
100	29.4	32.8	35.05	36.6	34.2
120	35.4	38.8	41.05	42.6	40.2
140	41.4	44.8	47.05	48.6	46.2
160	47.4	50.8	53.05	54.6	52.2

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE


SIZE A4

PJECTION

X. ±  
X ± 0.20  
.XX ± 0.10  
.XXX ±  
ANG ±



ORDER INFORMATION

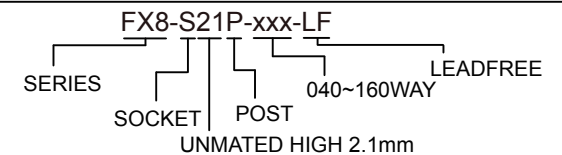

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 0.6mm BTB RCPT SMT S/T D/R TYPE