
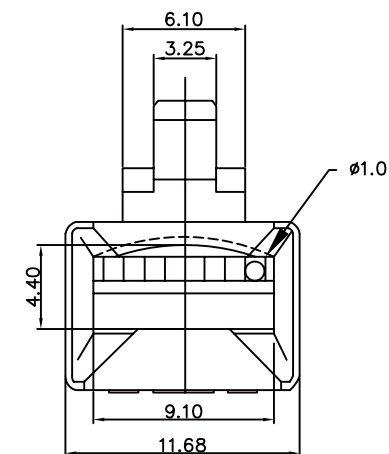
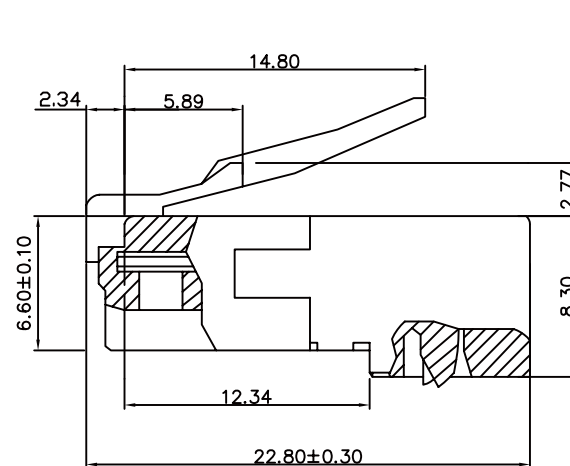
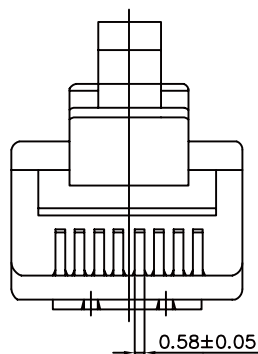


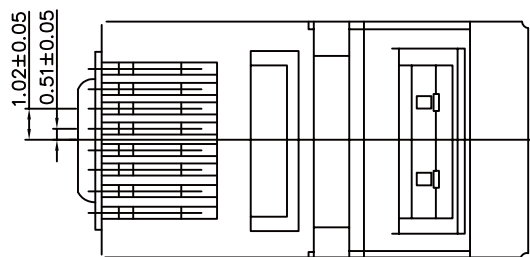


MECHANICAL:

Housing material: Polycarbonate (PC.)

UL 94V-2

OPERATING TEMPERATURE: -40°C~125°C



2 PRONGS FOR STRANDED WIRE

多芯線用二叉型金片

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MP-RM-0808-LF
SERIES | 8P8C | LEADFREE
METAL
ROUND OUTLET

DESCRIPTION: