
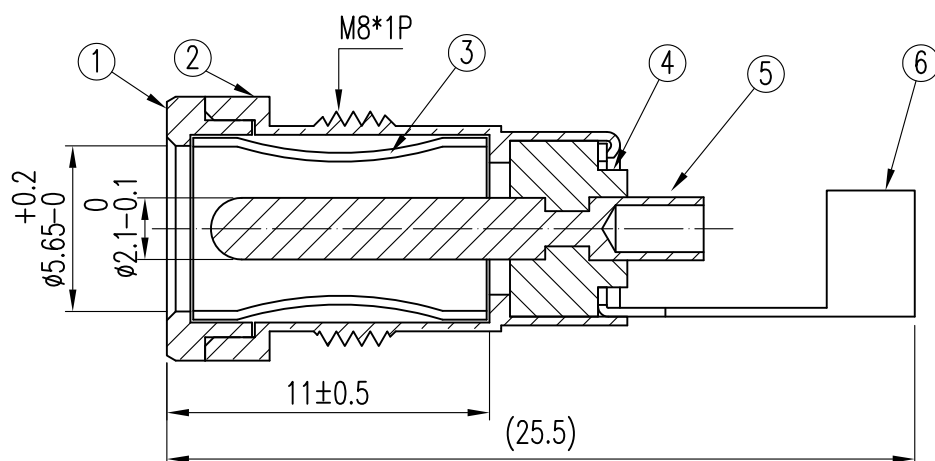
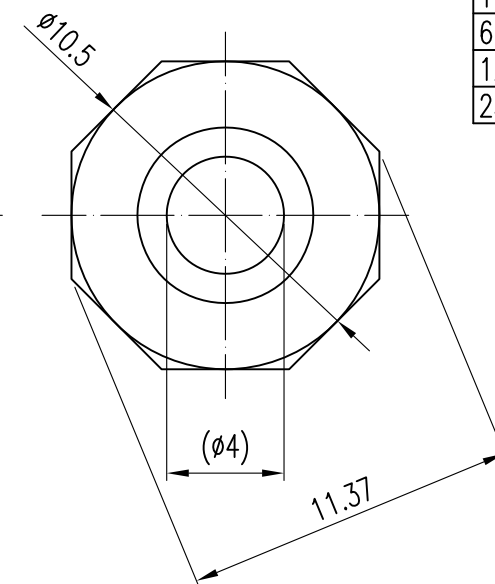


一般公差	
尺寸區分	公差
0>1.0	±0.1
1.0>6.0	±0.2
6.0>12.0	±0.3
12.0>25.0	±0.4
25.0>	±0.5

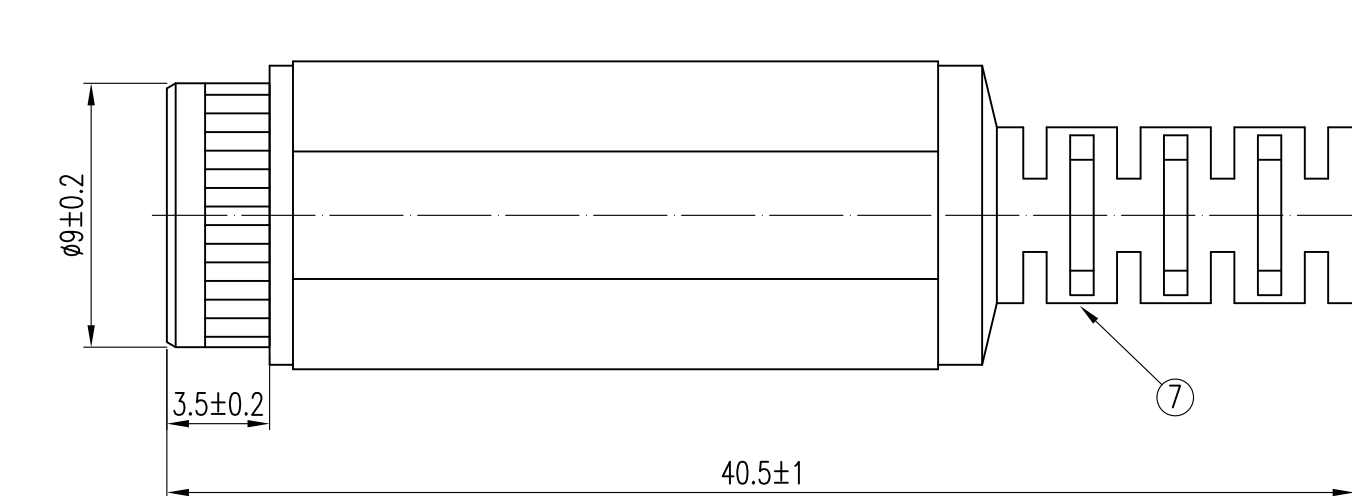

1. Dielectric strength: AC 500V at 1minute.
2. Insulation resistance: DC 500V/100MΩ min.
3. Rated voltage: 24V DC.
4. Rated current: 2A.

7	TPR BLACK
6	IRON NICKEL
5	BRASS NICKEL
4	PBT BLACK
3	P-BRONZE NICKEL
2	BRASS NICKEL
1	BRASS NICKEL
NO	CONTENT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DCJ-A-5721-LF
SERIES LEADFREE
ID: 2.1 Ø
OD: 5.65 Ø
ASSEMBLY

DESCRIPTION: DC JACK 5.5*2.1 (Asby Type)