


Dimensions:

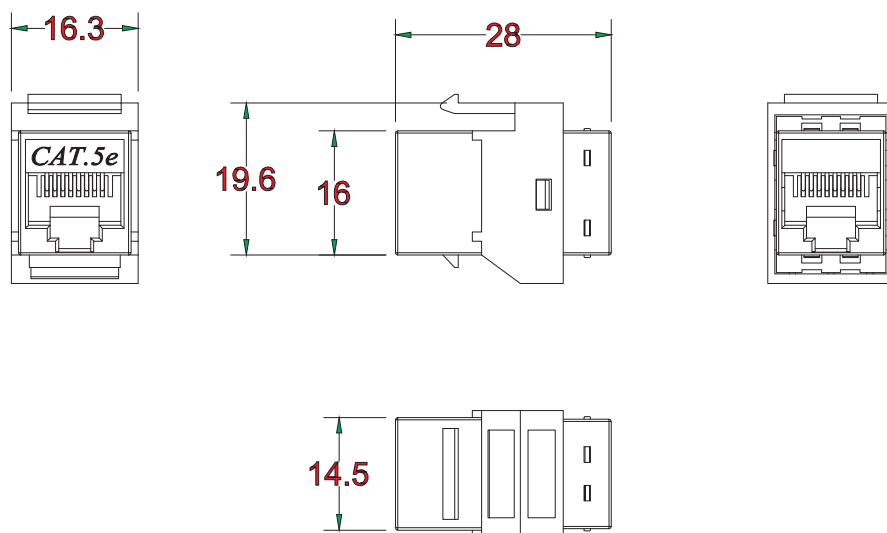

Performance:

Meets Cat.5e EIA/TIA 568B.1 Standard.

Materials:

Plastic Body : Fireproof ABS UL-94V0

RJ-45 Jack : 8P8C 50 micro inches gold plated

PCB : FR-4 / 1.0mm UL-94V0

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)

Contact Resistance : 20m ohms (max.)

Current Rating : 1.5 Amps .

DC Resistance : 0.1 ohm (max.)

Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 ~ +70 degree / C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

RJX2-FSC5EPN28BK-0808-LF

SERIES

8P8C

BLACK

LONG 28mm

CAT.5E

PANEL

LEADFREE

FEMALE TO FEMALE 180°

DESCRIPTION: Cat.5e Slim Type Inline Coupler (UTP)