


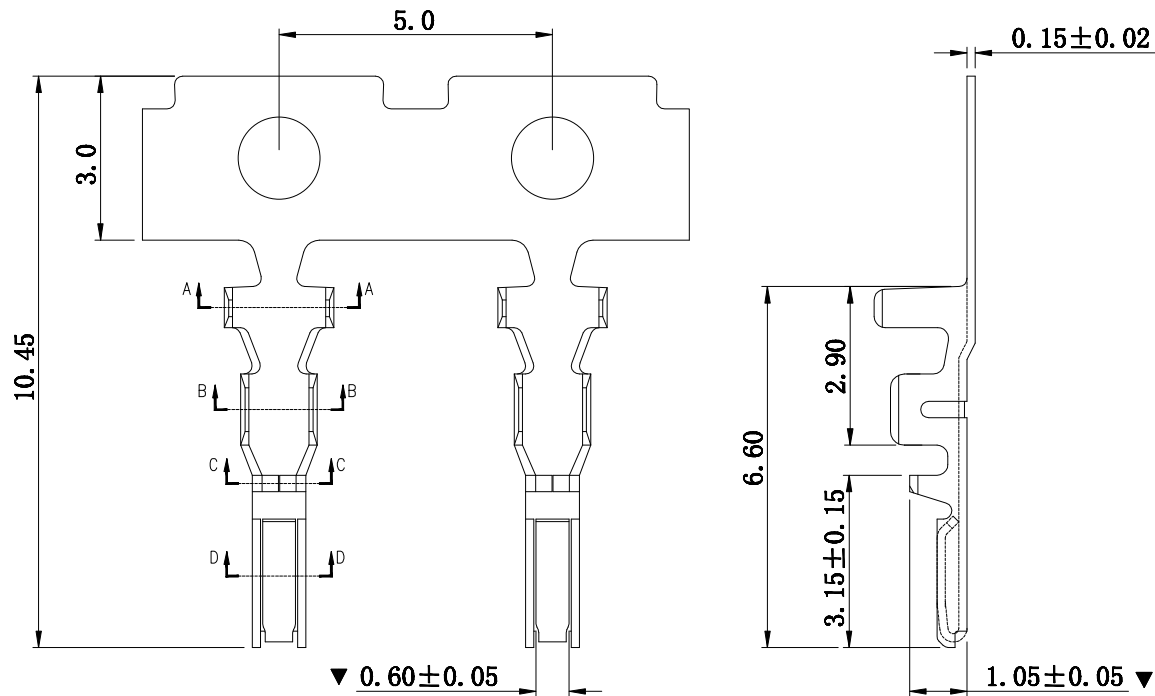

SPECIFICATIONS

Voltage rating: 100V AC, DC

Current rating: 2A, AC, DC

Withstanding Voltage: 500V AC/minute


Temperature range: -25° C~+85° C

Contact resistance: 20mΩ max


Applicable wire: AWG#24-#28

Material: Phosphor Bronze


Finish: Tin-Plated

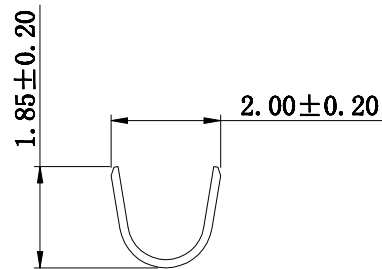


SECTION: A-A



SECTION: B-B



SECTION: C-C



SECTION: D-D

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.30
 .XX ± 0.25
 .XXX ± 0.20
 ANG ±

PPOJECTION



ORDER INFORMATION

ZPD-T-24-LF
 SERIES | LEADFREE
 24~28 AWG
 TERMINAL

DESCRIPTION: