
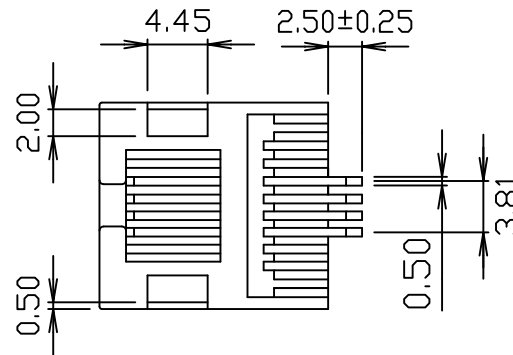


COPLANARITY:
THE MAXIMUM DISTANCE
BETWEEN LOWEST AND
HIGHEST PIN WHEN
HOUSING RESTS
ON A FLAT SURFACE




MATERIALS:

- HOUSING-DSM STANYL TE250F6 (NYLON-46)
BLACK COLOR, UL94V-0
- OR-NYLON ZYTEL FR-52
BLACK COLOR, UL94V-0

TERMINAL-0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND TIN/LEAD
IN SOLDER AREA.

HOLD DOWN-0.35mm THICK COPPER ALLOY,
PLATED WITH TIN-LEAD.

CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

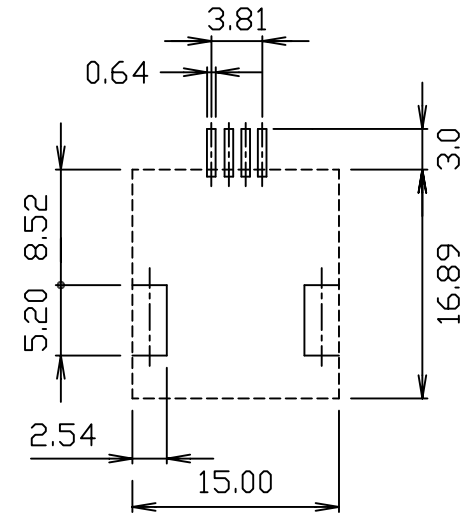

PCB LAYOUT


RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MJW11-KX06N-1004-LF

SERIES | 10P10C | LEADFREE
INNER EAR
06u GOLD
NON POST
BLACK

煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: 10POS. 8 CONTACTS, SOLDER TAB-INSIDE
LOW PROFILE 1 PORT, SIDE ENTRY SMT TYPE