


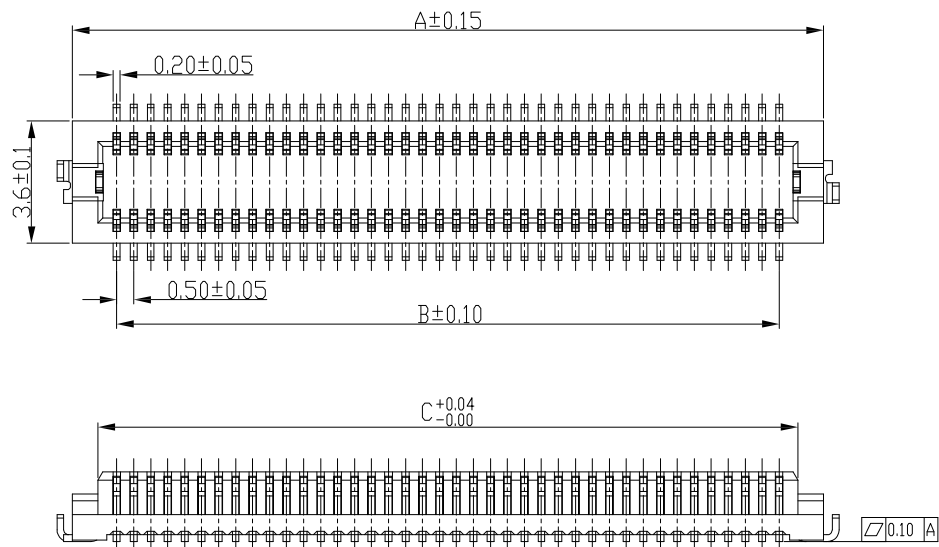

NOTES:

1. MATERIAL:

HOUSING: LCP, UL 94-V0, COLOR: BLACK



CONTACT: COPPER ALLOY

LEG: COPPER ALLOY


2. PLATING:

CONTACT: GOLD PLATED ON NICKEL OVERALL

LEG: TIN PLATED ON NICKEL OVERALL

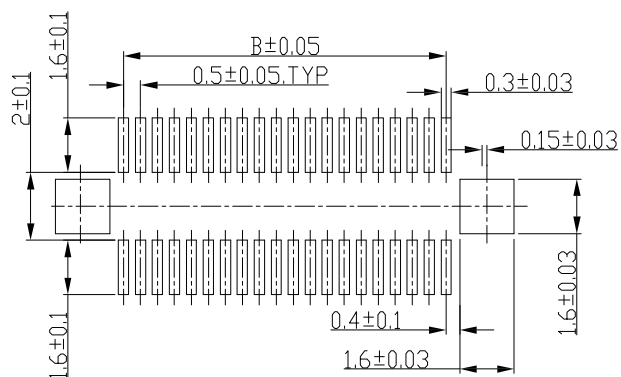

Recommended PCB Layout

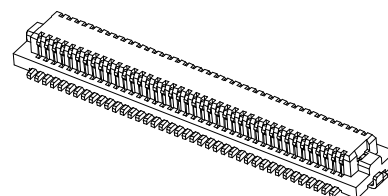

	A	B	C
10 PIN	4.60	2.00	3.10
12 PIN	5.10	2.50	3.60
14 PIN	5.60	3.00	4.10
20 PIN	7.10	4.50	5.60
22 PIN	7.60	5.00	6.10
24 PIN	8.10	5.50	6.60
30 PIN	9.60	7.00	8.10
32 PIN	10.10	7.50	8.60
36 PIN	11.10	8.50	9.60
40 PIN	12.10	9.50	10.60
50 PIN	14.60	12.00	13.10
60 PIN	17.10	14.50	15.60
80 PIN	22.10	19.50	20.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.20
.XXX ±
ANG ± 3°



ORDER INFORMATION

DF12-S07E-xxx-LF
SERIES | | | LEADFREE
010~080 WAY
EAR
0.7mm HIGH
FEMALE

DESCRIPTION: 0.5Ph Board to Board SMT Vertical 2.05H