

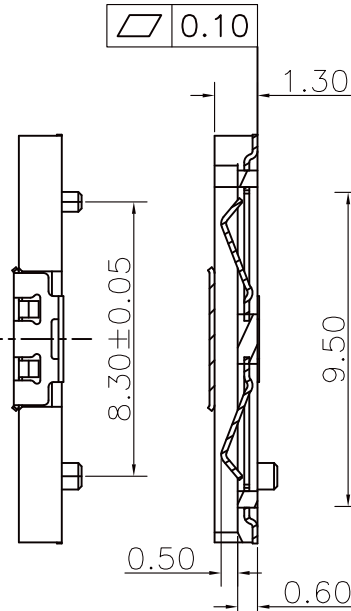
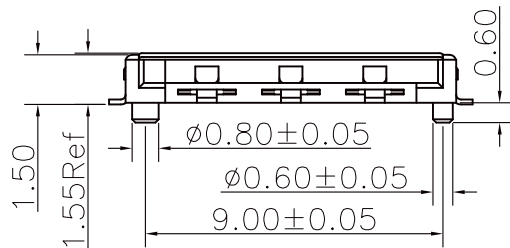


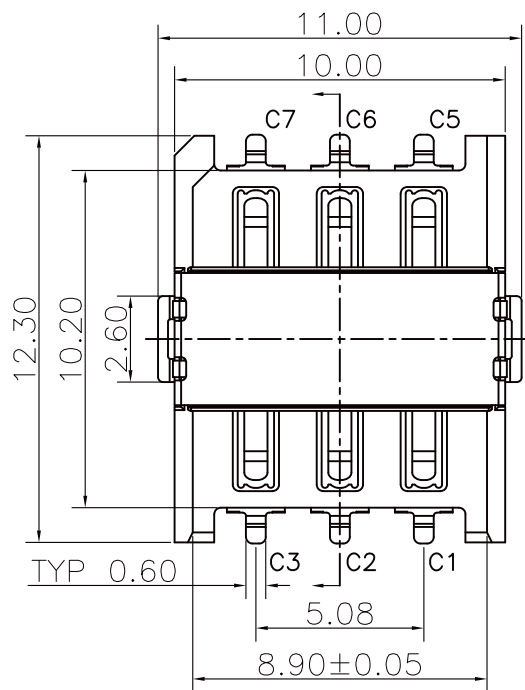

SECTION A-A

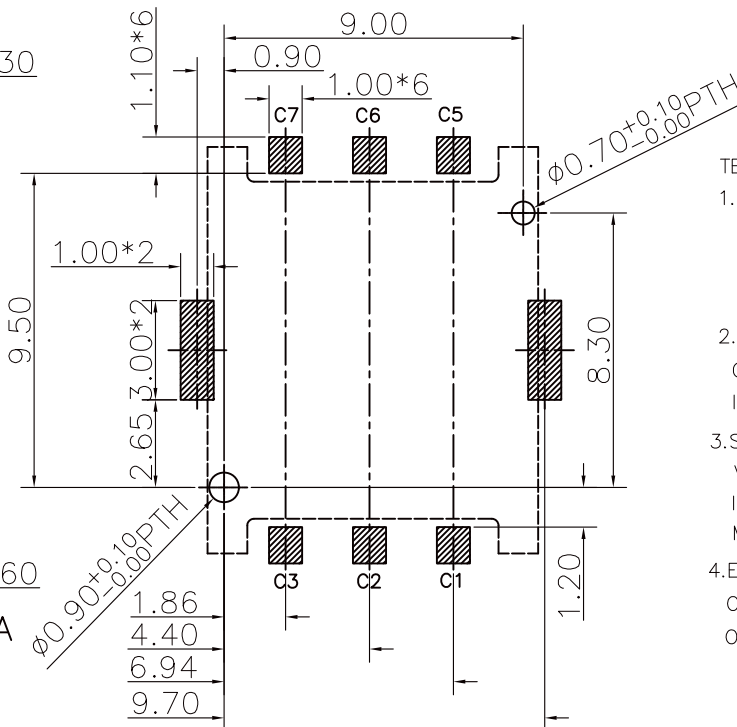

RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE ±0.05)

Nano-SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	HOUSING	1	Hi-temp Thermoplastic	Black UL94V-0
2	DATA CONTACT	6	Copper Alloy	Contact area:Gold plated
3	SHELL	1	Stainless Steel	SMT area:Gold plated

TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions: 12.30LX10.00WX1.50H mm

Weight: Approx 0.53±0.2g

Durability: 5,000 cycles min.

2.Electrical Characteristics

Contact resistance: 50mΩ typical, 100mΩ max

Insulation resistance: >1000MΩ/500V DC

3.Solderability

Vaporphase: 215°C, 30sec.Max


IR reflow: 250°C, 5sec.Max

Manual soldering: 370°C, 3sec.Max

4.Environmental Characteristics

Operating temperature: -40°C~+85°C

Operating humidity: 10%~+95%RH



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ± 0.35
X, ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION




ORDER INFORMATION

NASCT-W1115PR-06-LF

SERIES
LEADFREE
06WAY
REEL
POST
HIGH 1.55mm
PAD TO PAD 11.0mm
90°SMT

DESCRIPTION: Push-Pull Type, 6 PIN, H1.50mm

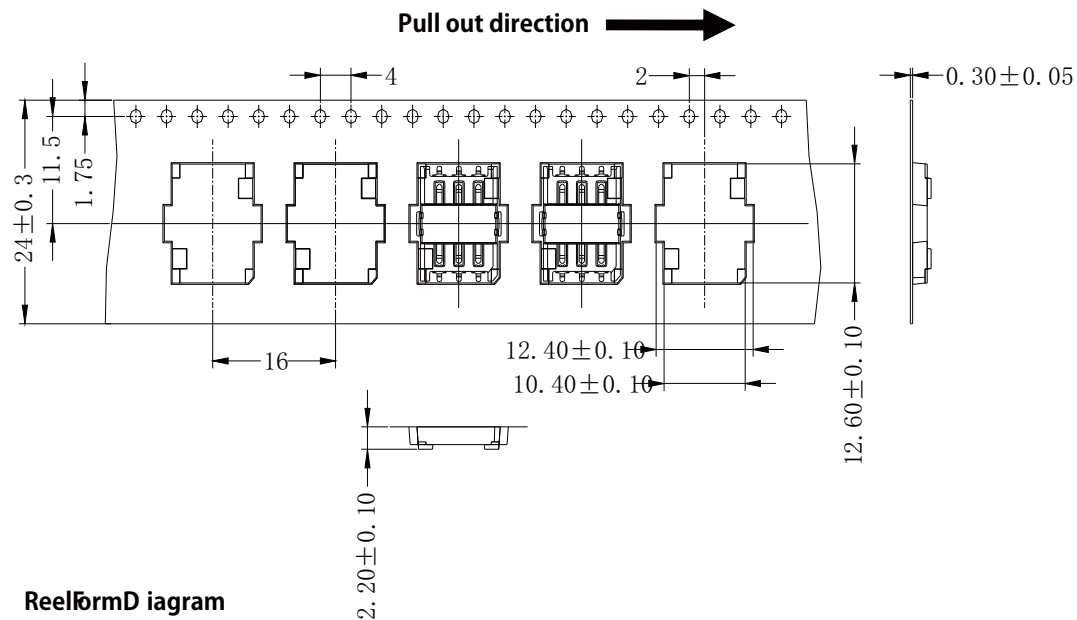

G.W.:0.70 KG

Q&A'y:1500 Pcs/Reel





N.W.:4.50 KG

G.W.:7.50 KG

Q&A'y : 15000 Pcs per Carton (10 Reel set in order)

Meas : 35.00Lx5.00Wx1.50H cm

ReelformD iagram

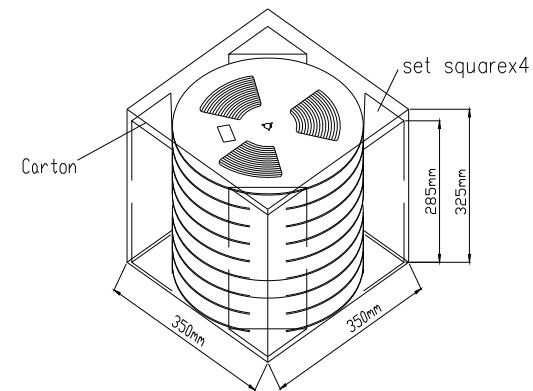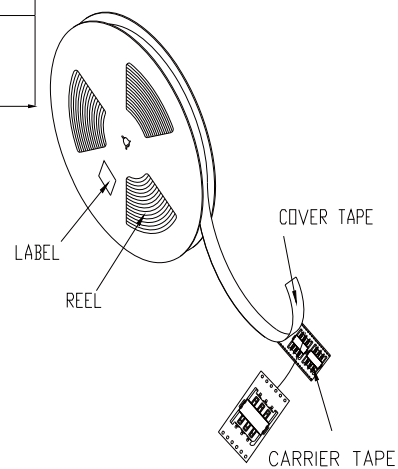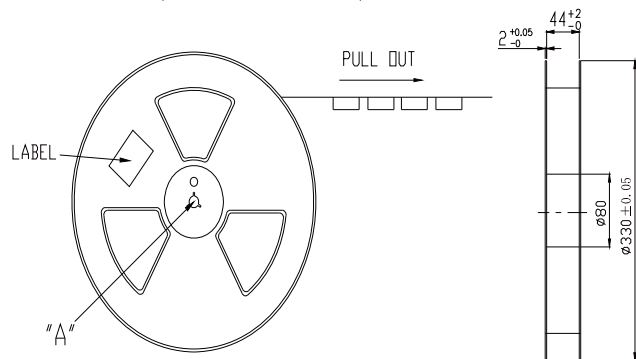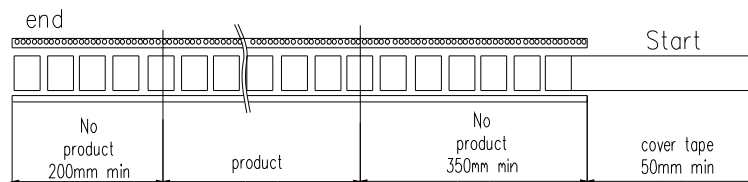

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.35

.X, ± 0.25

.XX, ± 0.15

.XXX, ± 0.10

ANG ±

PPOJECTION



ORDER INFORMATION

NASCT-W1115PR-06-LF

SERIES
90°SMT
LEADFREE
06WAY
REEL
POST
HIGH 1.55mm
PAD TO PAD 11.0mm

DESCRIPTION: Push-Pull Type,6 PIN,H1.50mm