

Features:



- 10, 20, 30, 40 circuits available
- .014"(0.35mm) square pin
- Pin Material: Gold-flash brass
 - Insulation: Nylon 9T

Specification:

- Current rating : 1A AC, DC
- Voltage rating: 100V AC, DC
- Contact resistance: 20mΩ max.
- Dielectric withstanding voltage: 500V AC/minute
- Ambient temperature range: -25°C ~ 85°C

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C
2X05	5.00	8.10	12.2
2X10	11.25	14.35	18.5
2X15	17.50	20.60	24.8
2X20	23.75	26.85	31.1

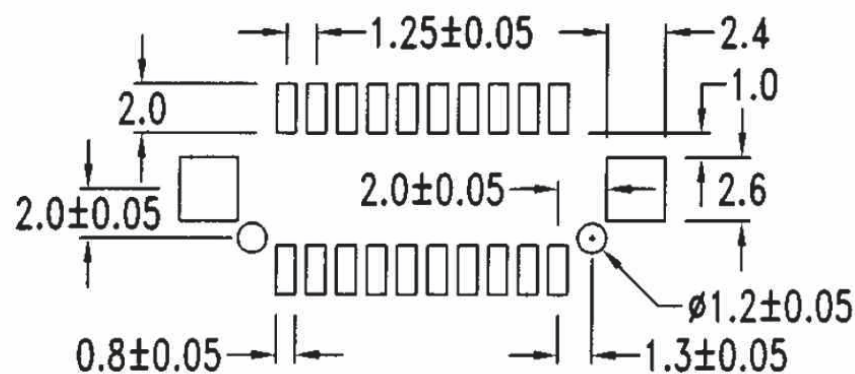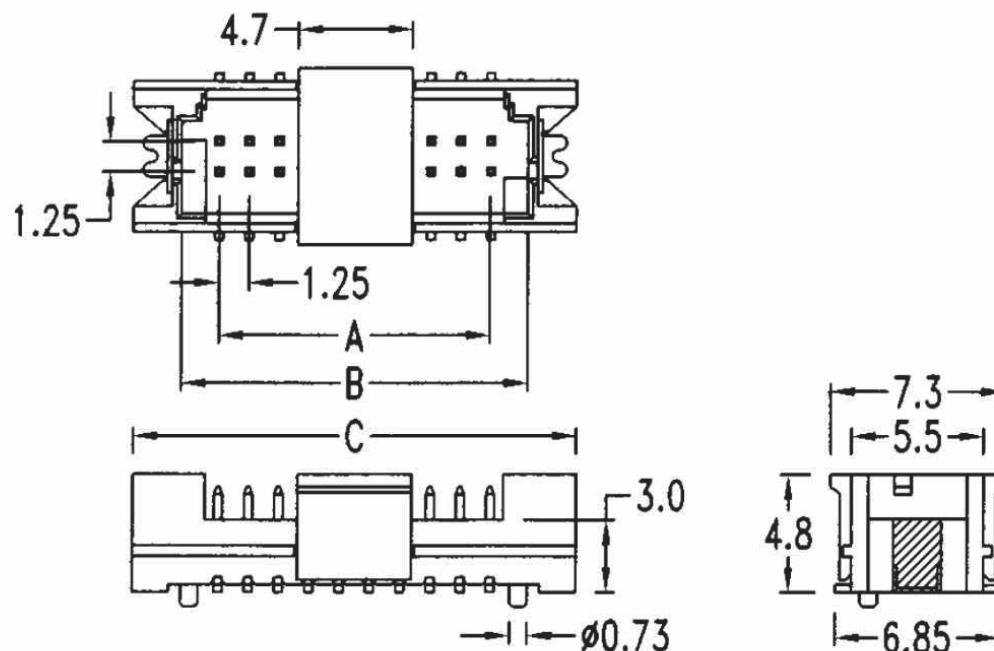

PCB layout: Solder side

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DF13-VP GC-2Xxx-LF

SERIES

180°SMT

CAP

GOLD

POST

LEADFREE
2X05:10WAY
2X20:40WAY

DESCRIPTION: