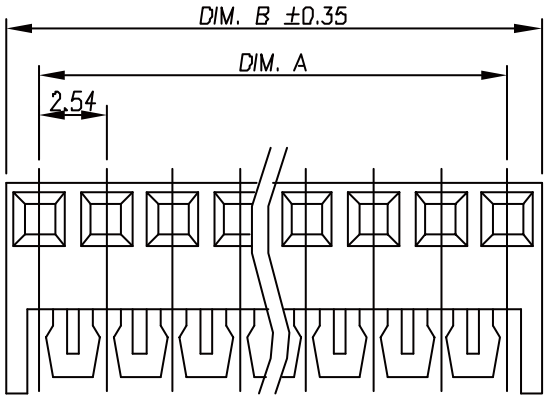

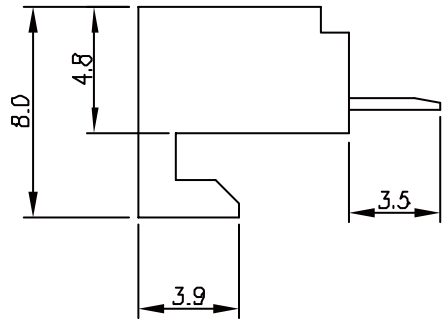

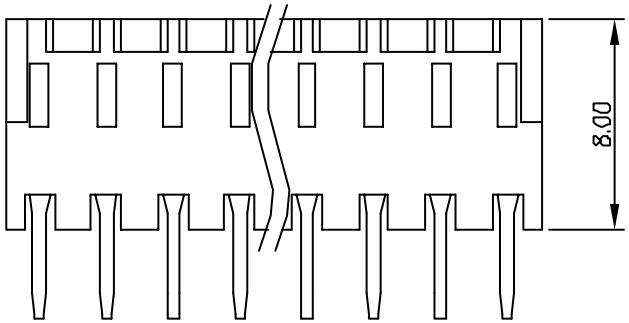

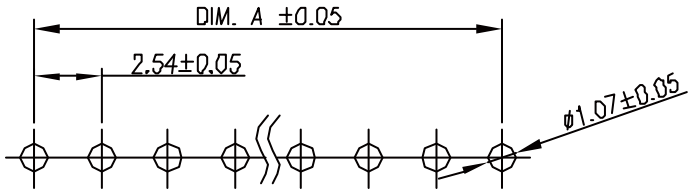

P.C.B LAYOUT

NOTES:

SPECIFICATION

1. Current : 2.5A max.
2. Voltage: 250V AC max.
3. Insulation Resistance: 1000 Megohms Min.
4. Contact Resistance: 20 Milliohms Max.
5. Dielectric Withstanding Voltage: 1500V AC
6. Temperature: 0°C to +75°
7. Solder Resistance:Dip connector terminal tails in solder:
   Solder Duration:5±0.5 seconds;
   Solder Temperature::245±5°C

MATERIAL

1. Contact: BRASS
2. Housing:Nylon66,UL 94V-2
3. PLATING :

   UNDERPLATING:NICKEL PLATING FOR ALL 50u" MIN.

   SOLDER TAIL PLATING:TIN(LEAD FREE) PLATING 100u"~200u".

NO. OF CONTACT	Dimension		NO. OF CONTACT	Dimension		NO. OF CONTACT	Dimension		NO. OF CONTACT	Dimension	
	A	B		A	B		A	B		A	B
02	2.54	5.10	09	20.32	22.88	16	38.10	40.66	23	55.88	58.44
03	5.08	7.64	10	22.86	25.42	17	40.64	43.20	24	58.42	60.98
04	7.62	10.18	11	25.40	27.96	18	43.18	45.74	25	60.96	63.52
05	10.16	12.72	12	27.94	30.50	19	45.72	48.28	26	63.50	66.06
06	12.70	15.26	13	30.48	33.04	20	48.26	50.82	27	66.04	68.60
07	15.24	17.80	14	33.02	35.58	21	50.80	53.36	28	68.58	71.14
08	17.78	20.34	15	35.56	38.12	22	53.34	55.90	29	71.12	73.68

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	TOLERANCES ARE
CHECKED BY GENIUS	X. ±
UNIT / mm	SCALE 1 : 1
DATE	.XX ±
SIZE A4	PPOJECTION

.X ±
.XXX ±
ANG ±



ORDER INFORMATION

MX-T-xx-LF

SERIES | LEADFREE | 02~29WAY | TOP ENTRY

DESCRIPTION: