

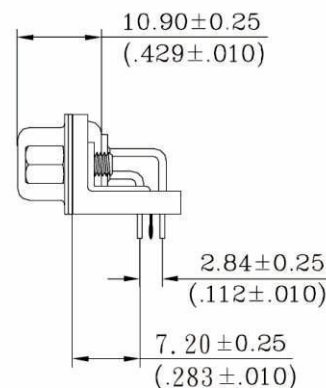
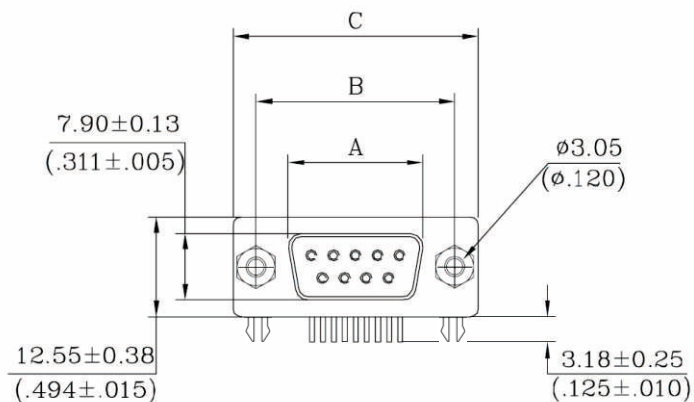


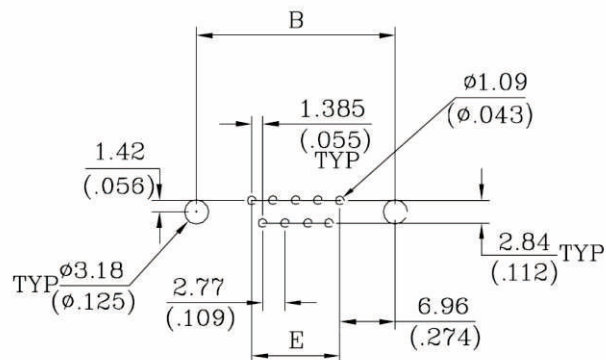

No. of Contact	A ± 0.25 $\pm .010$	B ± 0.13 $\pm .005$	C ± 0.38 $\pm .015$	D ± 0.25 $\pm .010$	E
09	16.33 .643	24.99 .984	30.81 1.213	19.28 .759	11.08 .436
15	24.66 .971	33.32 1.312	39.14 1.541	27.51 1.083	19.39 .763
25	38.38 1.511	47.04 1.852	53.04 2.088	41.28 1.625	33.24 1.310
37	54.84 2.159	63.50 2.500	69.32 2.729	57.71 2.272	49.86 1.963

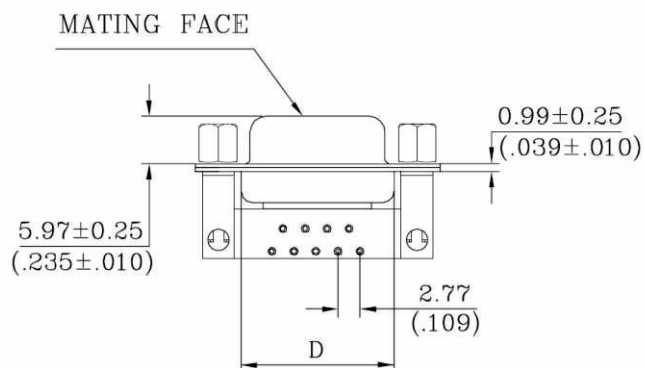

P.C.B LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

P PROJECTION



ORDER INFORMATION

DR72-SZJ-xx-LF

SERIES | LEADFREE
09~37 WAY
JACKSCRW
CLIP
FEMALE

DESCRIPTION: