

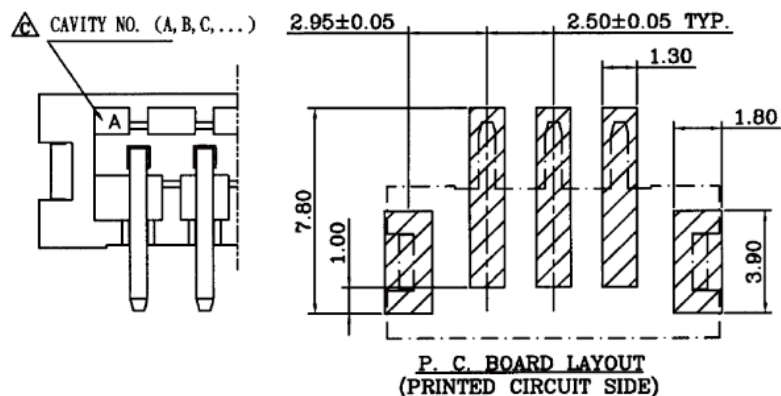


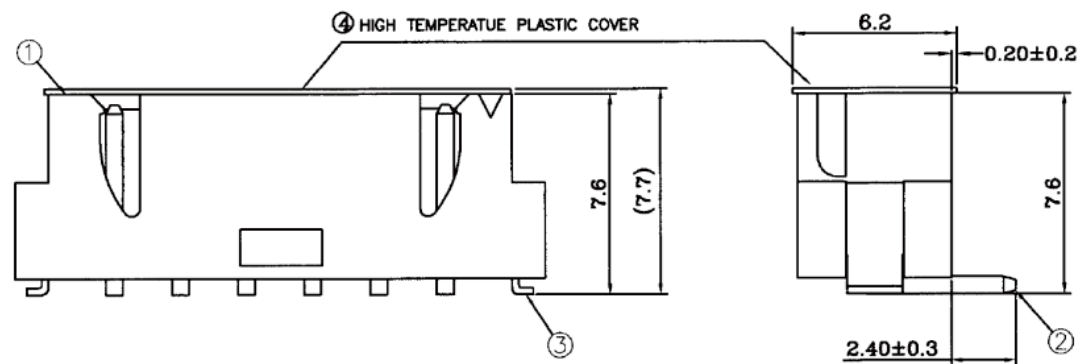

NOTES:

1. MATERIAL:

- ① BASE: HIGH HDT NYLON 94V-0
- ② PIN: BRASS, PLATING FOLLOW ORDERING INFORMATION.

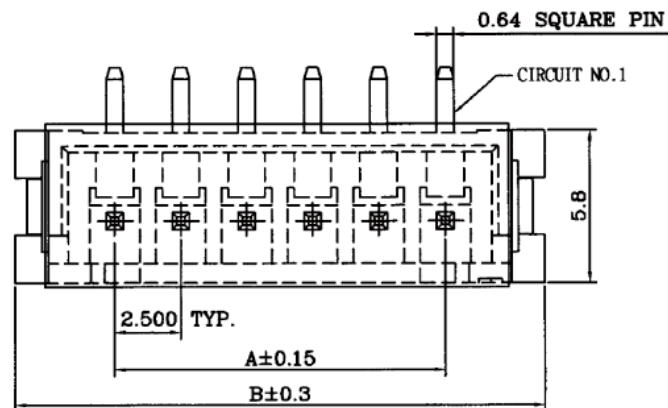

- ③ PEG: BRASS, MATTE TIN-PLATED

- ④ PICK-AND-PLACE CAP : PI PLASTICES

2. CIRCUITS: 2PIN ~ 15PIN.

DIMENSIONS:

CIRCUITS	DIM.A	DIM.B
2	2.5	10.0
3	5.0	12.5
4	7.5	15.0
5	10.0	17.5
6	12.5	20.0
7	15.0	22.5
8	17.5	25.0
9	20.0	27.5
10	22.5	30.0
11	25.0	32.5
12	27.5	35.0
13	30.0	37.5
14	32.5	40.0
15	35.0	42.5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±




ORDER INFORMATION

XH-VCR-xx-LF
SERIES | | | LEADFREE
02~15WAY
REEL
CAP
180°SMT

DESCRIPTION:

CIRCUITS	DIM.D	DIM.E	DIM.F
2 ~ 3 PIN	25.5	24.0	---
4 ~ 5 PIN	33.5	32.0	28.40
6 ~ 10 PIN	45.5	44.0	40.40
11 ~ 15 PIN	57.5	56.0	52.40

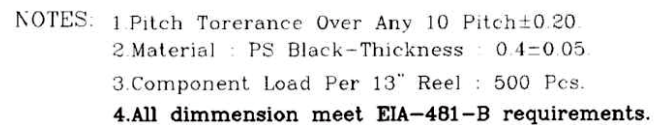

煜倫股份有限公司

XH-VCR-xx-LF
SERIES REEL CAP 180°SMT
LEADFREE 02~15WAY

DESCRIPTION: