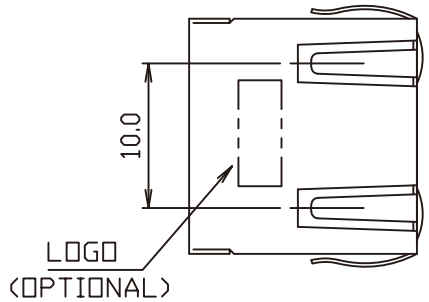

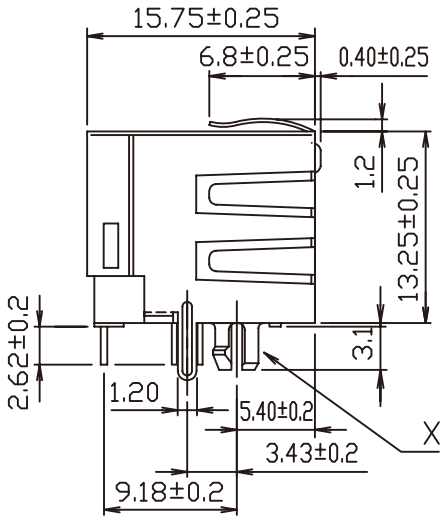



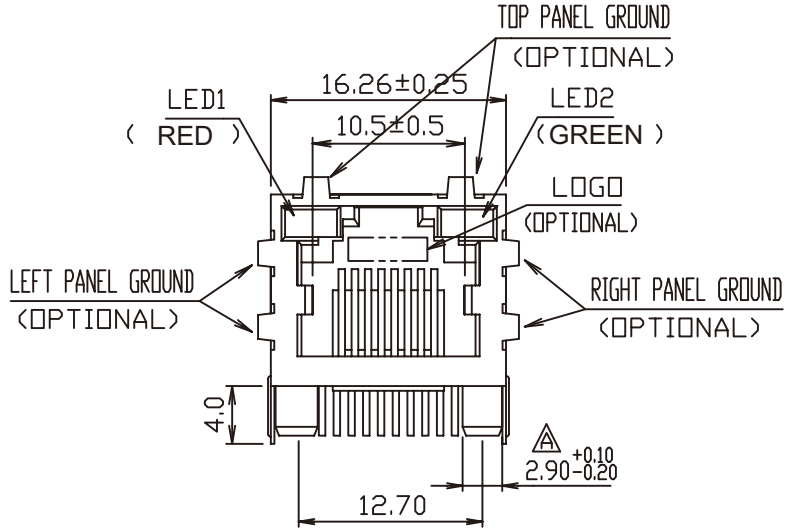



DETAIL X

MATERIALS:
- HOUSING-DSM STANYL TE250F6 (NYLON-46)
  HEAT DEFLECTION TEMP.290°
  BLACK COLOR,UL94V-0
- CONTACTS-0.35mm THICK PHOS-BRONZE PLATED
  WITH HARD GOLD AND TIN/LEAD IN
  SOLDER AREA.
- SHIELD-0.25mm THICK COPPER ALLOY,
  PLATED WITH TIN-LEAD.

ELECTRICAL:
INSULATION RESISTANCE: 500 MEGOHMS MINIMUM
CURRENT RATING: 1.5 AMPS
VOLTAGE RATING: 150 VOLTS AC
LED FALINGS:
FORWARD DC CURRENT: 2mA
FORWARD VOLTAGE: 1.8 VOLTS TYPICAL
REVERSE VOLTAGE: 5 VOLTS MINIMUM
POWER DISSIPATION: GRN.=24mW;YELL.=36mW

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

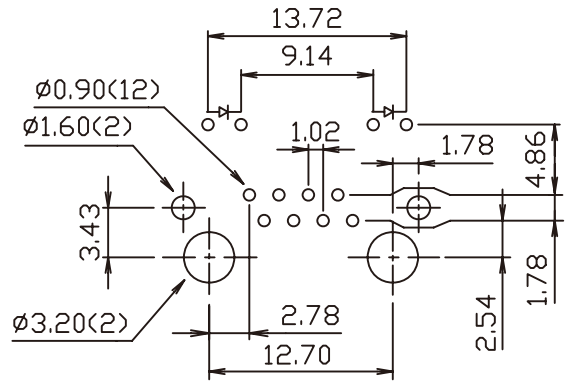

PCB LAYOUT

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ± .X ± 0.25 .XX ± 0.13 .XXX ± ANG ±
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	



ORDER INFORMATION

MJF13UL-KF06B3RG-0808

- SERIES
- BLACK
- FULL SPRING
- REAR TAB 3.43mm
- 06u" GOLD
- LED1 / LED2 RED / GREEN
- 8P8C

DESCRIPTION: 8POSITION LED SHIELDED FLAT PIN, SIDE ENTRY JACK