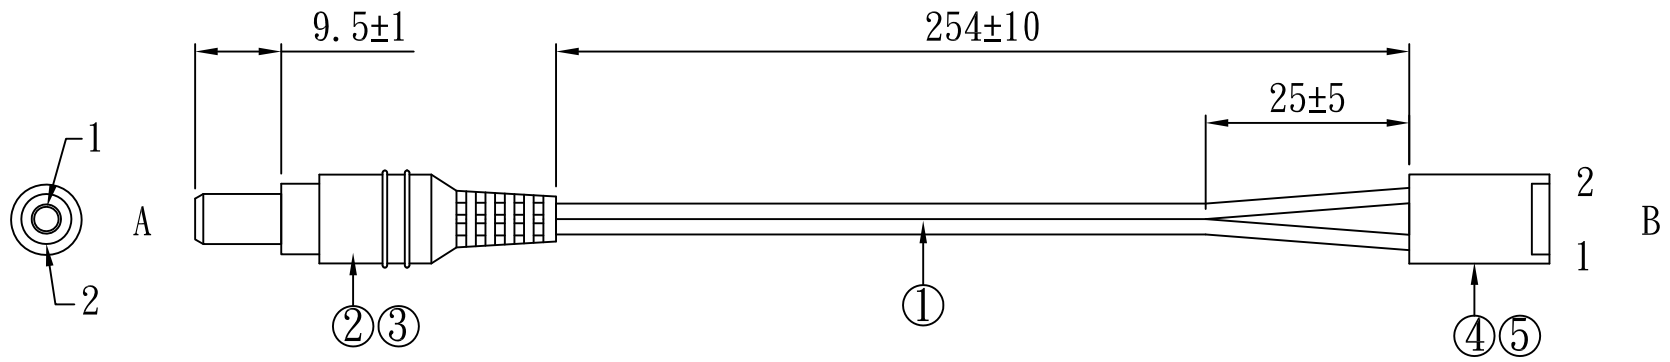

A	COLOR	B
1	RED (+)	2
2	BLACK (-)	1

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

NO.	ITEM.	DESCRIPTION	Q'TY
1	WIRE:	UL2468 #24*2F (RED, BLACK)	1pcs
		OD:1.8*1.8	
2	CONN:	DC PLUG Ø5.5*Ø2.1*L:20.5	1pcs
3	OUTERMOLED:	PVC 45P BLACK GH-044	3.5g
4	HOUSING:	MK-H-02	1pcs
5	TERMINAL:	MK-T-22	2pcs

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

DCMK-200224C1-E10N-LF

- SERIES
- DC 2.0Ø TO MK 02 WAY
- 24 AWG
- COMBO WIRE
- MALE TO FEMALE
- 254mm
- LEADFREE

DESCRIPTION: CABLE ASS"Y