
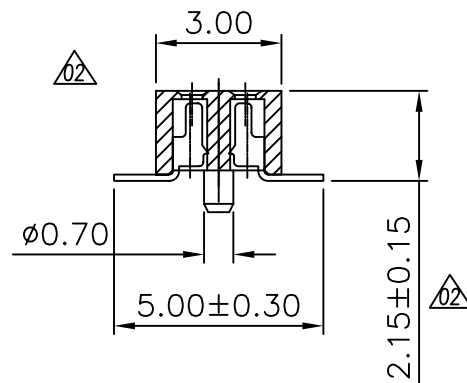
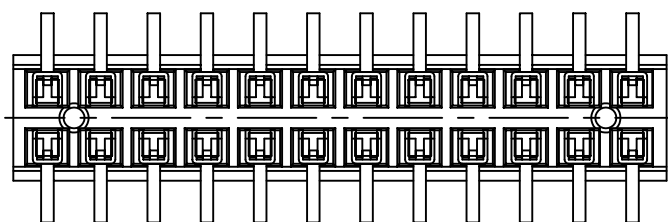
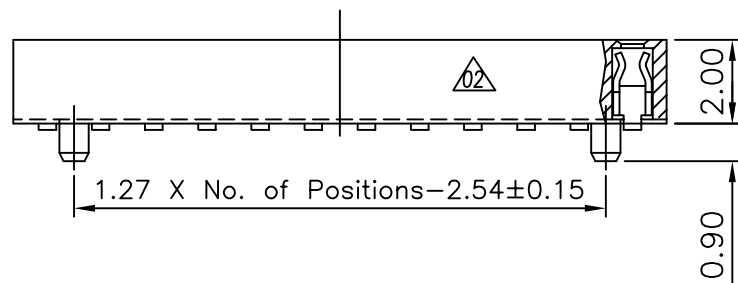


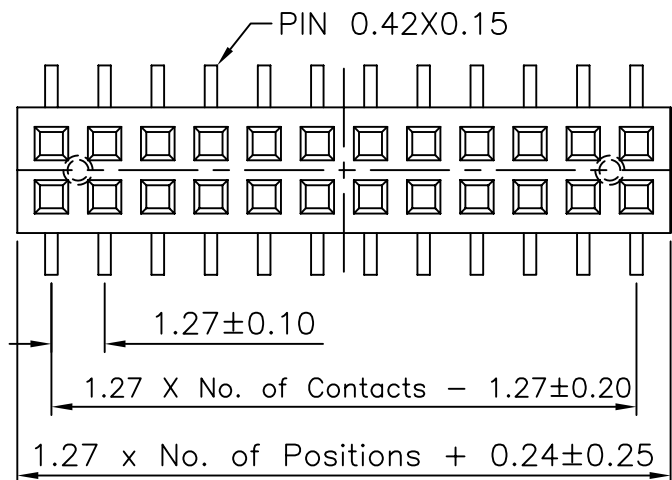

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0

注: 此塑膠用於SMT型態26~35PIN塑膠材質用LCP料生產, 03~25PIN塑膠材質用PA6T料生產。

Recommended P.C.Board Layout

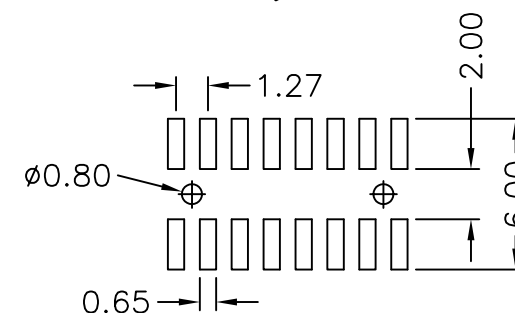

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±



ORDER INFORMATION

YA-V22P-2Xxx-LF
SERIES LEADFREE
2X03:06WAY
2X50:100WAY
180°SMT POST
HIGH 2.2mm

DESCRIPTION: 1.27 FEMALE HEADER DAUL ROWS SMT TYPE W/POST