
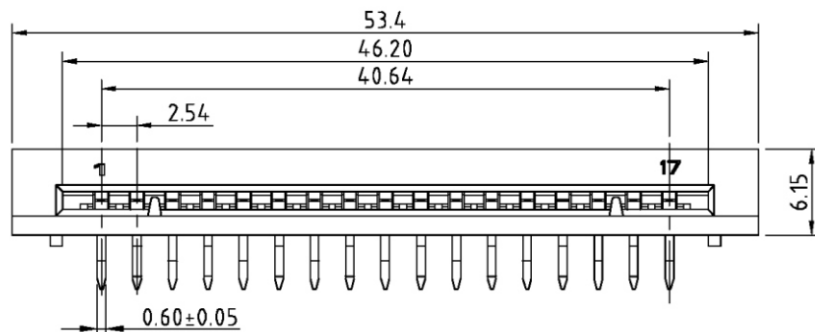
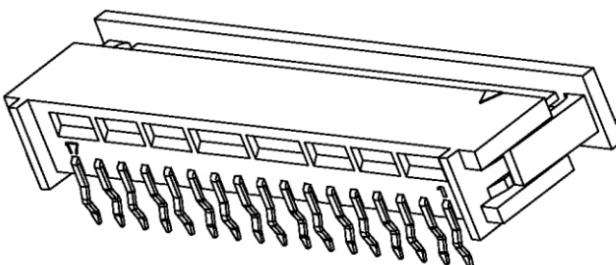


RECOMMENDED PCB LAYOUT



Notes

1. FEATURE:

Insulator: PBT+30% G/F, 94V-0, Black
Contact: Phosphor Bronze, Tin Plating Over Nickel.

2. SPECIFICATION:

Current Rating: 1A AC,DC
Voltage Rating: 250V,AC RMS
Withstanding Voltage: 1000V AC/minute.
Contact Resistance: 25 milliohms max.
Insulation Resistance: 1000 Megohms min.
Temperature range: -40 to + 85 Degree C
Applicable PC Board Thickness: 1.60mm [.063"]

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FPC-RZBX-17-LF
SERIES | 17 WAY | LEADFREE
NON POST
BOTTOM CONTACT
ZIF
DIP 90°

DESCRIPTION: