


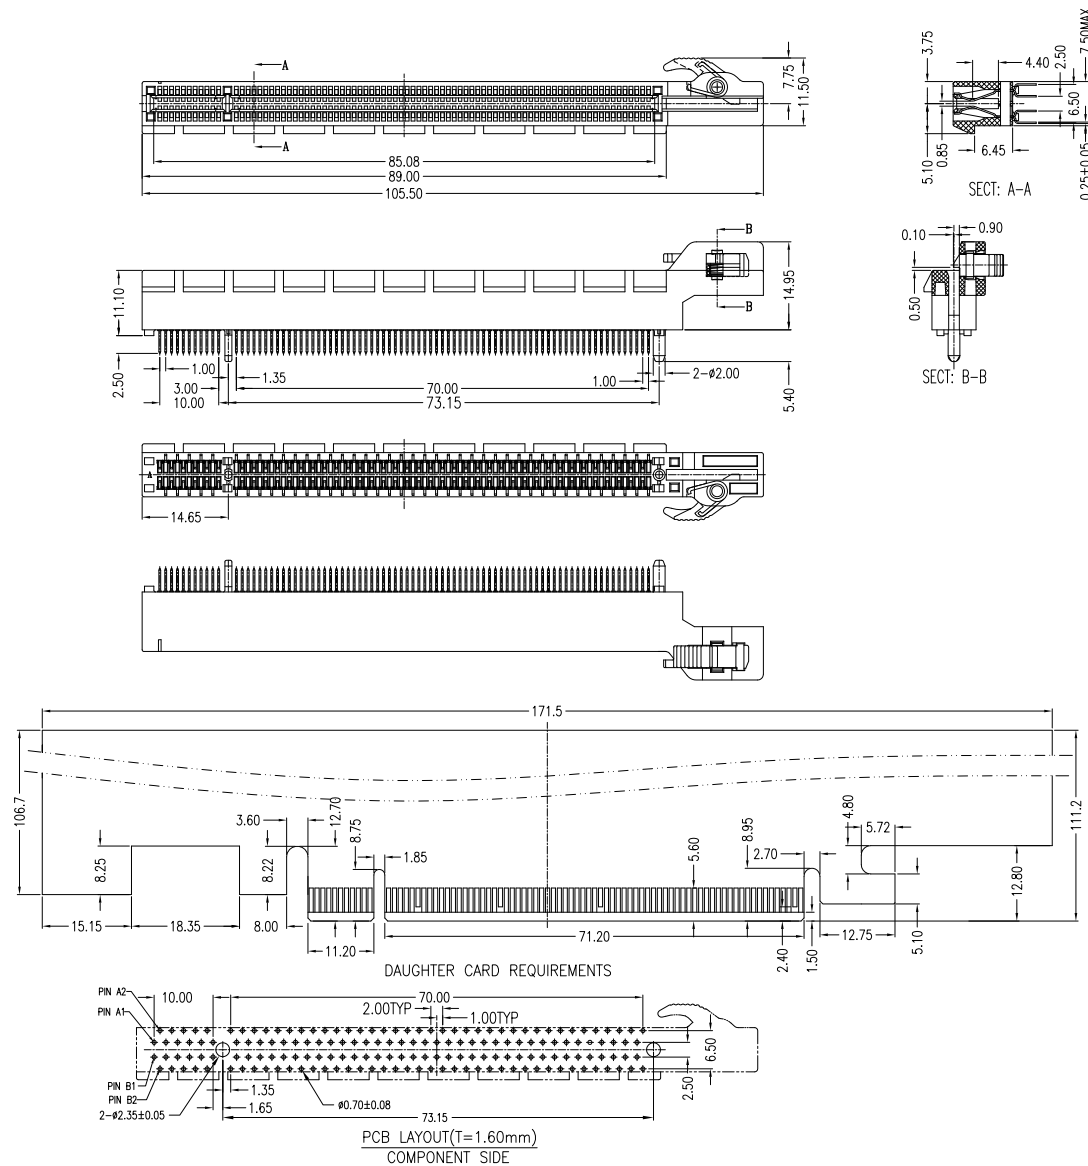

NOTES:

*Material

Body: Nylon46/Nylon66,UL 94V-0 Rated.
 Plastic Ear: Nylon66,UL 94V-2 Rated.
 Spring: 65Mn.
 Contacts: Brass
 Plating: Au plating on contact area;
 Sn(100u" Min.) plating on solder tail;
 Ni(50u" Min.) underplating overall.

*Mechanical:

Insertion Force: 1.15N max per contact pair;
 Withdrawal Force: 0.15N min per contact pair;
 Contact Retention Force: 3.43N min per contact;

*Electrical Specification

Contact Resistance : 30 Milliohms Max.
 Current Resistance : 1.1 Ampere
 Insulation Resistance : 1000 Megohms Min, At 500V AC.

*Environmental

Operating Temperature : -55°C to +105°C

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
 .X ± 0.35
 .XX ± 0.25
 .XXX ± 0.15
 ANG ± 3°



ORDER INFORMATION

PCIX-DLS-164-LF

SERIES

LEADFREE

164WAY

SLID LOCK

DIP 180°

DESCRIPTION: PCI Express 164 Pin Connector
 Clamp Right Side Type(Plastic Posts)