
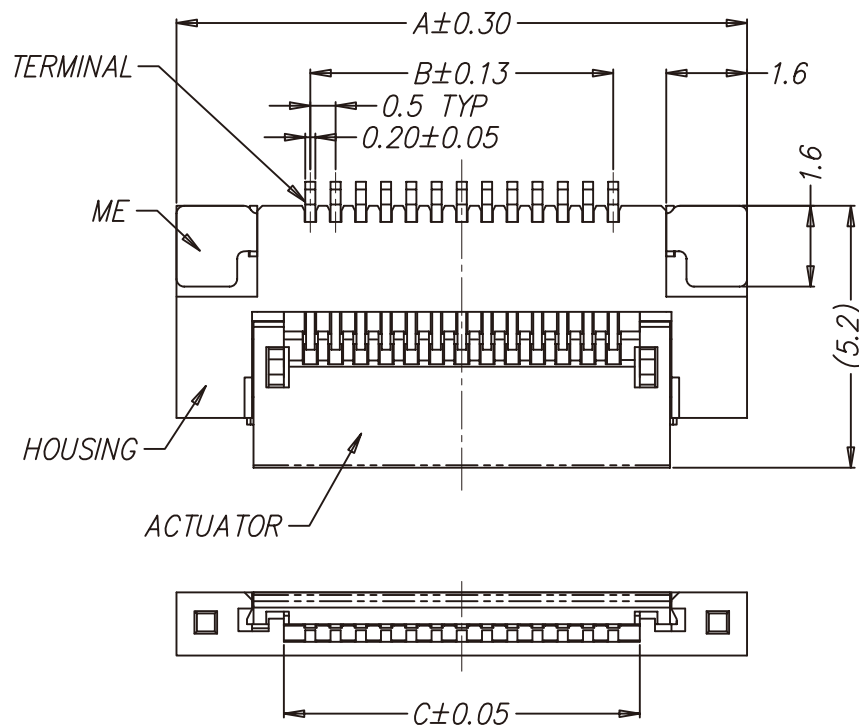


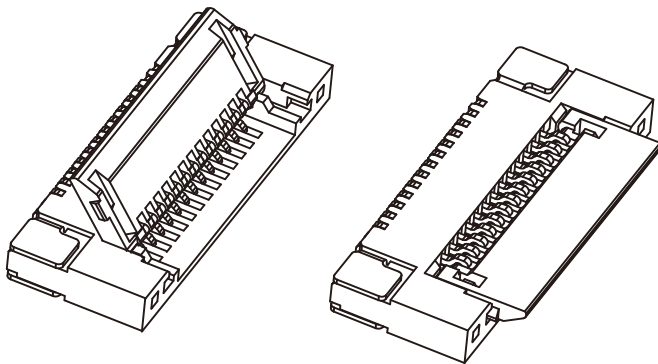


PERFORMANCE CHARACTERISTICS


Operating Voltage:	50V AC Max.
Current Rating:	0.5 Amp Max.
Contact Resistance:	40 m Ω Max.
Insulation Resistance:	50 M Ω Min.
Dielectric Withstanding Voltage:	250V AC/minute
Accommodated FFC/FPC Thickness:	0.30 $\pm$ 0.03 mm
Operating Temperature:	-20°C TO +85°C

MATERIAL

Housing:	High Temperature Thermoplastic;UL 94V-0 (Color : Ivory)
Actuator:	High Temperature Thermoplastic;UL 94V-0 (Color : Black)
Terminal:	Copper Alloy
ME:	Copper Alloy
Plating:	See ordering information

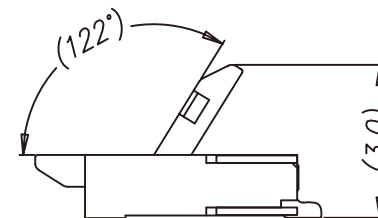

(WHEN ACTUATOR IS OPEN)

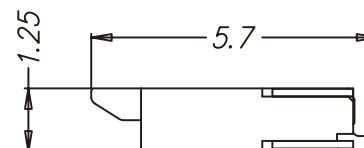

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


DATE

SCALE 1 : 1

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$





ORDER INFORMATION

FPV-WHB12-xx-LF
SERIES | | | LEADFREE
04~35WAY
HIGH 1.25mm
BOTTOM CONTACT
HINGED ZIF
90°SMT

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com

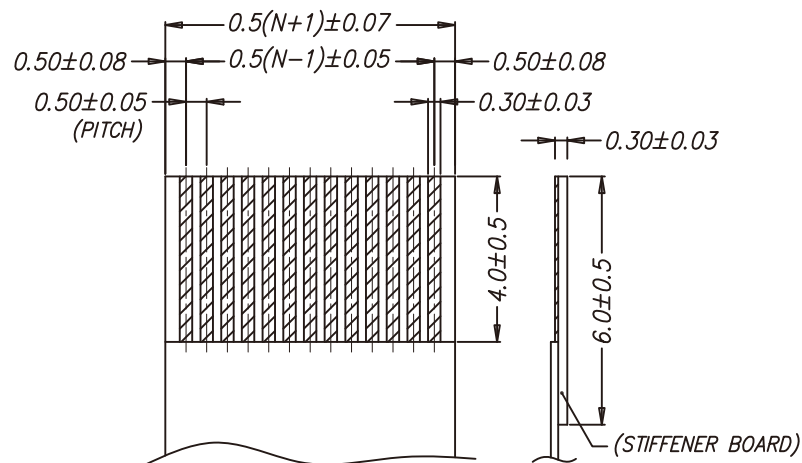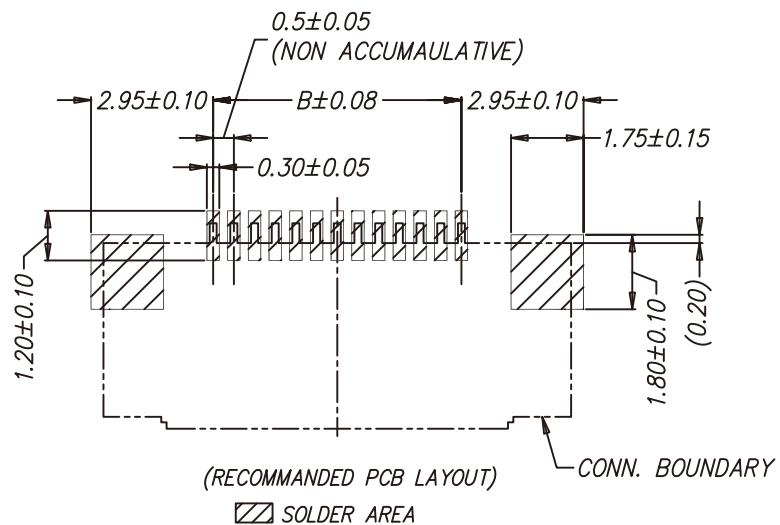

APPLICABLE FFC
RECOMMENDED DIMENSION

TABLE OF DIM.

POS.	A	B	C
4	6.95	1.50	2.55
5	7.45	2.00	3.05
6	7.95	2.50	3.55
7	8.45	3.00	4.05
8	8.95	3.50	4.55
9	9.45	4.00	5.05
10	9.95	4.50	5.55
11	10.45	5.00	6.05
12	10.95	5.50	6.55
13	11.45	6.00	7.05
14	11.95	6.50	7.55
15	12.45	7.00	8.05
16	12.95	7.50	8.55
17	13.45	8.00	9.05
18	13.95	8.50	9.55
19	14.45	9.00	10.05
20	14.95	9.50	10.55
21	15.45	10.00	11.05
22	15.95	10.50	11.55
23	16.45	11.00	12.05
24	16.95	11.50	12.55
25	17.45	12.00	13.05
26	17.95	12.50	13.55
27	18.45	13.00	14.05
28	18.95	13.50	14.55
29	19.45	14.00	15.05
30	19.95	14.50	15.55
31	20.45	15.00	16.05
32	20.95	15.50	16.55
33	21.45	16.00	17.05
34	21.95	16.50	17.55
35	22.45	17.00	18.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FPV-WHB12-xx-LF
SERIES
LEADFREE
04~35WAY
HIGH 1.25mm
BOTTOM CONTACT
HINGED ZIF
90°SMT

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com