

NOTES:

1. MATERIAL:

1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,
UL94V-0; COLOR:BLACK.

1.2 CONTACT: COPPER ALLOY

2. FINISH:

2.1 CONTACT:





GOLD FLASH PLATING OVERALL.

50u" MIN. NICKEL UNDERPLATING OVERALL.

3. REFLOW SOLDER CAPABLE TO 260°C
PER **Morethanall** SPEC.

4. IF CKT AT 20-70PIN DID NOT DEFEND THE POLARIZATION KEY;

5. THAN CKT >= 80PIN HAVE ALREADY DEFEND THE POLARIZATION

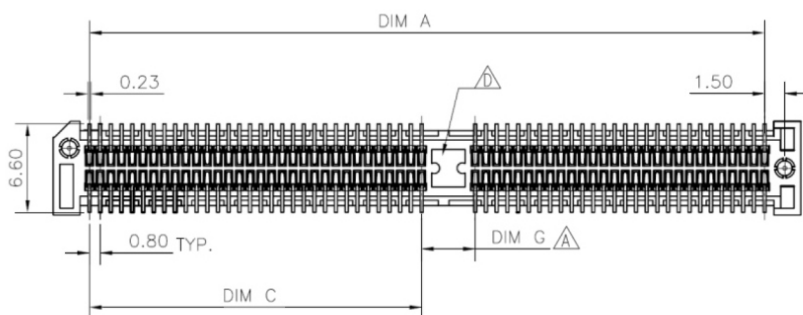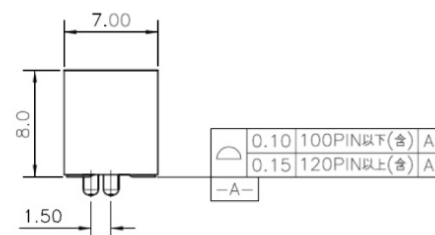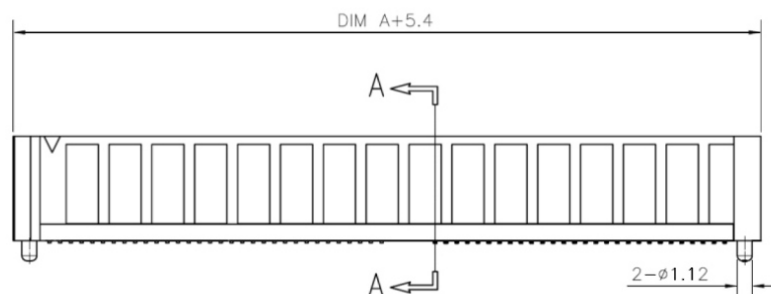

SECTION A-A

Part No.	CKT	Dim A	Dim C	Dim D	Dim F	Dim G	Dim H	KEY
E08-VPC-040	40	15.20	N/A	17.20	N/A	N/A	N/A	WITHOUT
E08-VPC-100	100	42.40	20.80	44.40	22.80	4.00	2.40	WITH
E08-VPC-120	120	50.40	24.80	52.40	26.80	4.00	2.40	WITH
E08-VPC-140	140	58.40	28.80	60.40	30.80	4.00	2.40	WITH
E08-VPC-160	160	66.40	32.80	68.40	34.8	4.00	2.40	WITH
E08-VPC-200	200	82.40	40.80	84.40	42.8	4.00	2.40	WITH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1


.XXX ± 0.10

DATE

ANG ± 1°

SIZE A4

PPOJECTION



ORDER INFORMATION

E08-VPC-xxx-LF
SERIES T T LEADFREE
040~200WAY
MYLAR
POST
180°SMT

DESCRIPTION: