
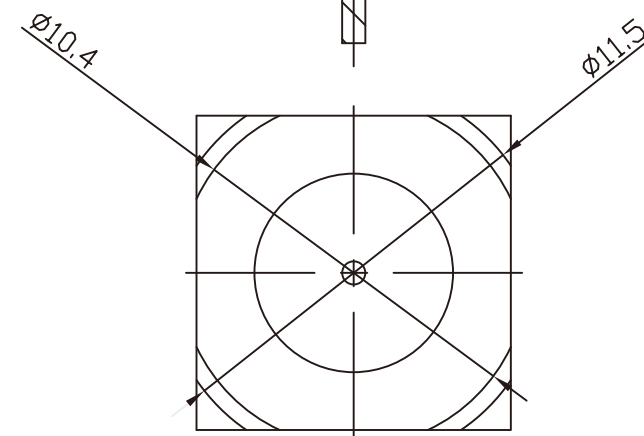
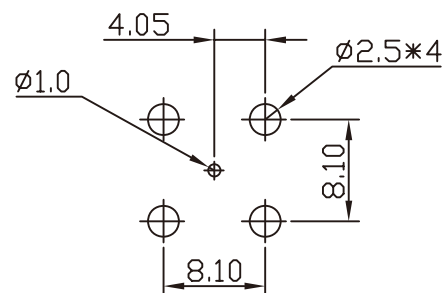
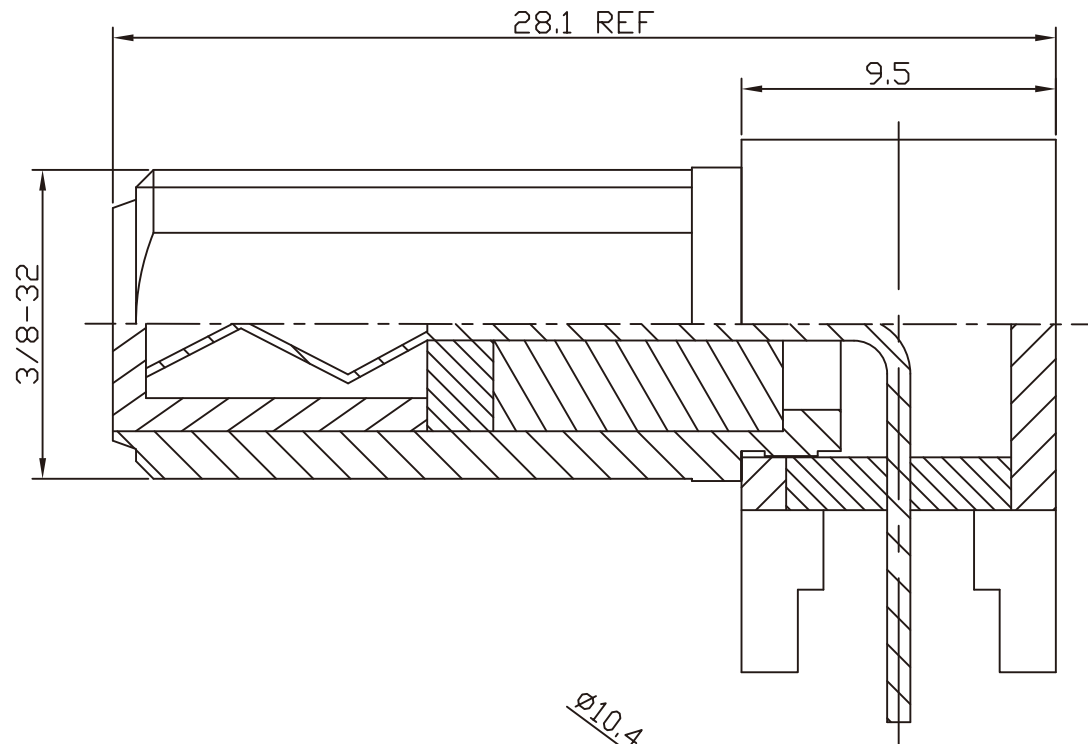


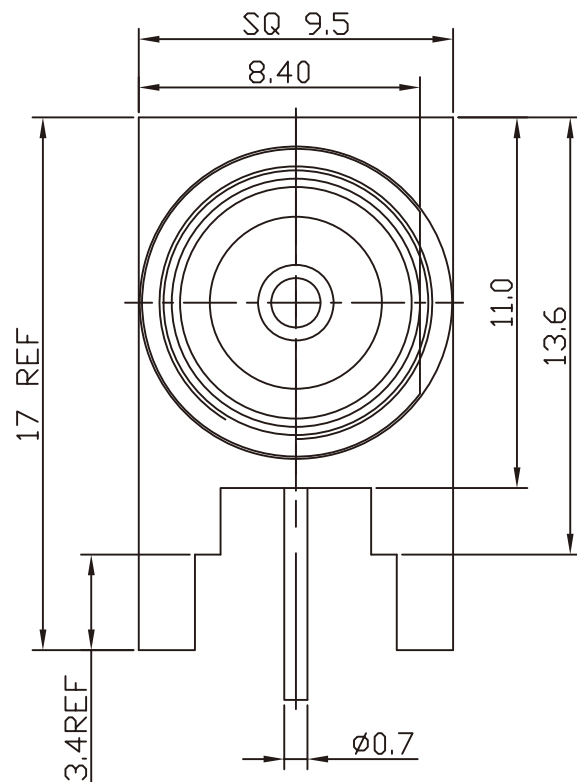

SOLDERING HEAT:250DEG 10SEC

6	DIELECTRIC	DELIN	WONE	1
5	DIELECTRIC	DELIN	WONE	2
4	PIN	BRASS	GOLD	1
3	DIELECTRIC	DELIN	WONE	1
2	BODY	BRASS	NICKEL	1
1	BODY	BRASS	NICKEL	1
MO	DESCRIPTION	MATERIAL	FINISH	QTY

RoHS Compliant

TOLERANCES ARE

0.5-5	=±0.2
5-30	=±0.4
30-120	=±0.6
120-315	=±1
315-1000	=±1.6
1000-2000	=±2.4

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION



ORDER INFORMATION

F-JRL28RF-75-LF
 SERIES JACK
 LEADFREE
 75 OHM
 ROUND FLAT
 LONG 24.5mm
 DIP 90°

DESCRIPTION: RIGHT ANGLE F FEMALE P.C MOUNT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com