

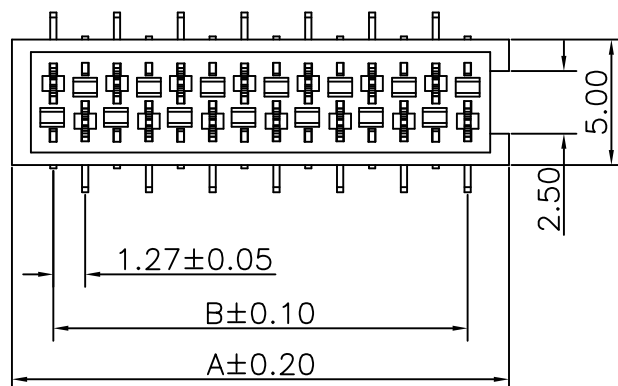
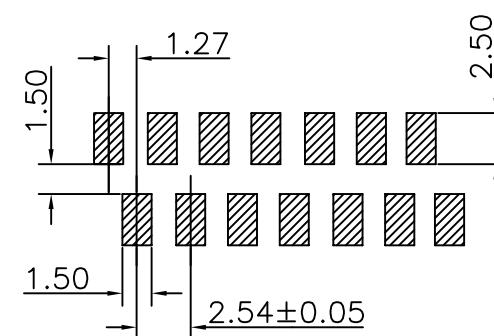



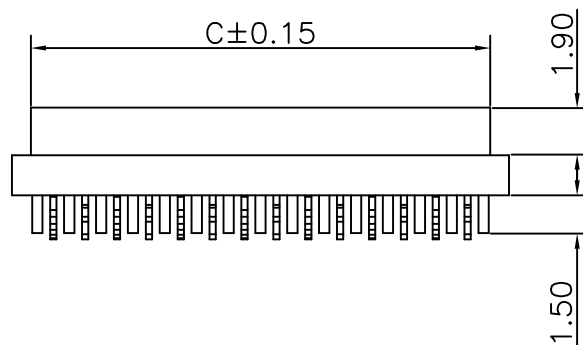

Pin No.	A	B	C
4	7.10	3.81	5.60
6	9.64	6.35	8.14
8	12.18	8.89	10.68
10	14.72	11.43	13.22
12	17.26	13.97	15.76
14	19.80	16.51	18.30
16	22.34	19.05	20.84
18	24.88	21.59	23.38
20	27.42	24.13	25.92

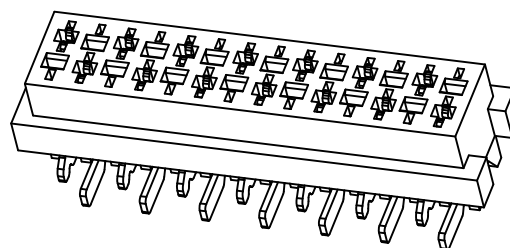

Specifications:

Current rating:1.0A AC,DC

Voltage rating:250V AC, DC

Contact resistance:20m ohm Max

Insulation resistance:1000M ohm Min

Withstanding voltage:AC 500V AC/minute

Operating Temperature:-40°C ~ +105°C

Materials:

Insulator:High Temp Plastic UL94V-0

Contact material:Phosphor Bronze

Finish:Tin Plated

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION



X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±




ORDER INFORMATION

MIM-SV-xx-LF
SERIES LEADFREE
04~20WAY
180°SMT
FEMALE


DESCRIPTION: 2.54mm Micro-Match Miniature SMD Type

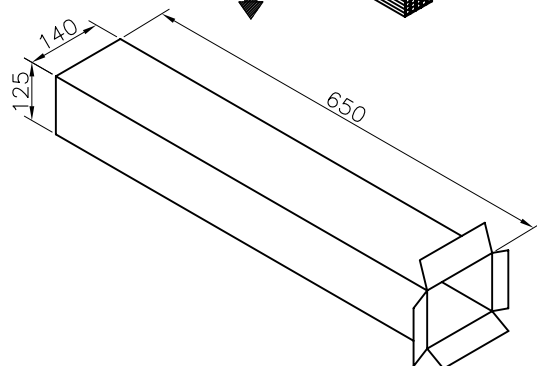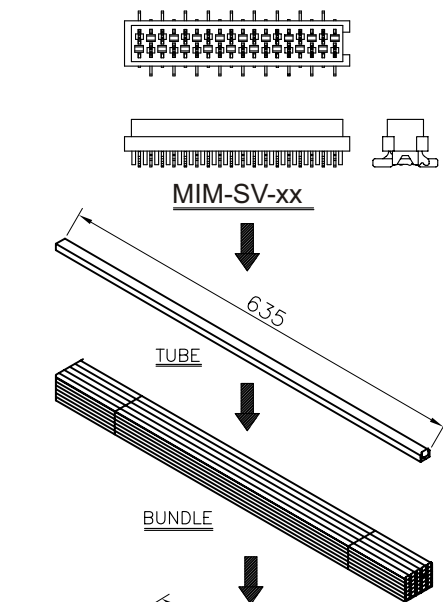

INNER CARTON

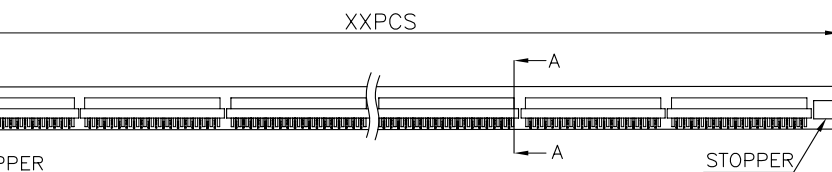


TUBE LAYOUT




Section:A-A (Scale 15)

TUBE Part No: MIM-SV-xx

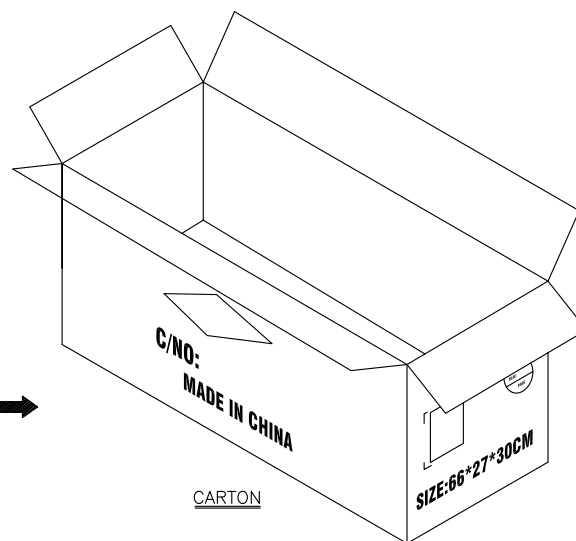

CARTON

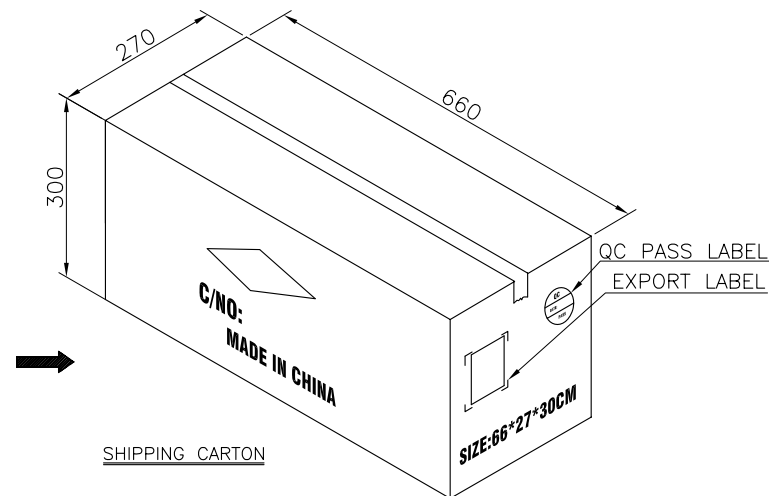

SHIPPING CARTON

SPECIFICATIONS:

1.DIMENSION

TUBE SIZE:635(L)X8.5(W)X10.8(H) (MM)

INNER CARTON SIZE:650(L)X140(W)X125(H) (MM)

CARTON SIZE:660(L)X270(W)X300(H) (MM)

2.QUANTITY:

XX PCS/TUBE

150 TUBE/INNER CARTON

4 INNER CARTON/CARTON

Q'TY:XXXPCS

CIRCUITS	PCS/管	管/内箱	PCS/内箱	Q'TY
04	86	150	12900	51600
06	64	150	9600	38400
08	50	150	7500	30000
10	42	150	6300	25200
12	35	150	5250	21000
14	30	150	4500	18000
16	27	150	4050	16200
18	24	150	3600	14400
20	22	150	3300	13200
22	20	150	3000	12000
24	18	150	2700	10800
26	17	150	2550	10200

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MIM-SV-xx-LF
SERIES | LEADFREE
04~26WAY
180°SMT
FEMALE

DESCRIPTION: 2.54mm PCB Connector SMD Type Packing list