


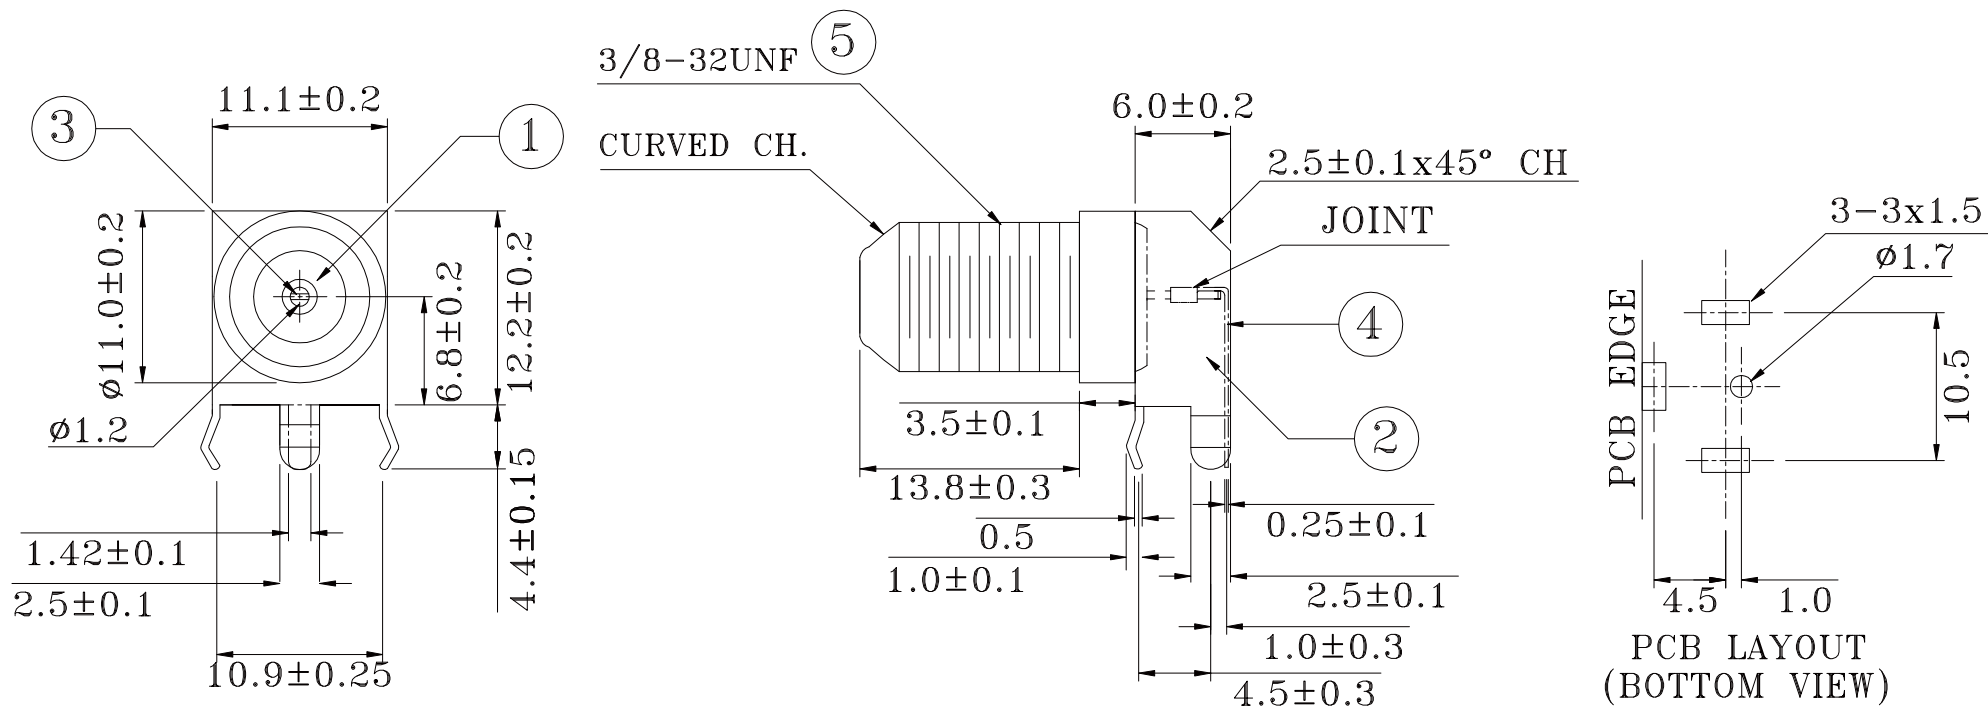

NO.	NAME	MATERIAL	FINISH	Q'TY
1	INSULATOR	P.P	NATURAL	1
2	BRACKET	C.R.S 0.41mm	TIN PLATED	1
3	CENTER PIN	PHOS. BRONZE	TIN PLATED	1
4	TERMINAL	BRASS	TIN PLATED	1
5	BODY	BRASS	NICKEL PLATED	1

ELECTRICAL SPECIFICATIONS:

VOLTAGE RATING: AC 1500V

WITH STANDING VOLTAGE: AC 500V ONE MINUTE

INSULATION RESISTANCE: $500M\Omega$ MIN AT DC 500V

CONTACT RESISTANCE: MAX $5m\Omega$ AT DC 1A

IMPEDANCE: 75Ω NOMINAL

VSWR: 1.2 MAX. 0-1,500 MHZ

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$


.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION



ORDER INFORMATION

F-JR-75-LF
SERIES | LEADFREE
75 OHM
DIP 90°
JACK

DESCRIPTION: