




RECOMMENDED PCB LAYOUT



SECTION:A-A



NOTE:
 MATERIAL:
 HOUSING:THERMOPLASTIC;(NYLON)UL 94V-0/UL 94V-2
 CONTACT:BRASS
 PLATING:MATING AREA-SELECTED GOLD OVER NICKEL
 SOLDER AREA-TIN OVER NICKEL
 SPECIFICATION:
 VOLTAGE RATING: 250V
 CURRENT RATING: 1A
 CONTACT RESISTANCE TERMINAL:30m Ω MAX
 DIELECTRIC WITHSTANDING VOLTAGE:500V AC/MIN
 INSULATION RESISTANCE:1000M Ω MIN

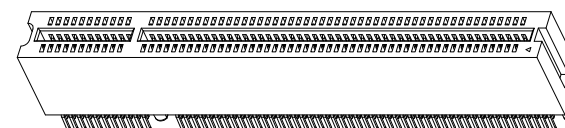

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

PCI-D-120-LF
 SERIES LEADFREE
 120WAY
 DIP 180°

DESCRIPTION: