
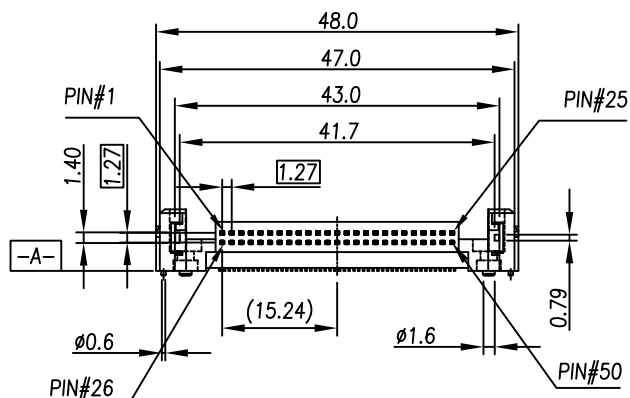
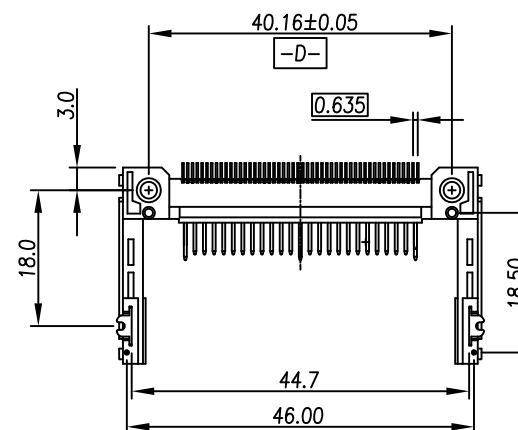



Pin Type	Interface Dim L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25,26	B	EN-05-0810	2005/08/11	TONY
General	4.25 mm	All Other Pins	C	EN-10-0418	2010/04/09	TONY
Power	5.0 mm	1,13,38,50				

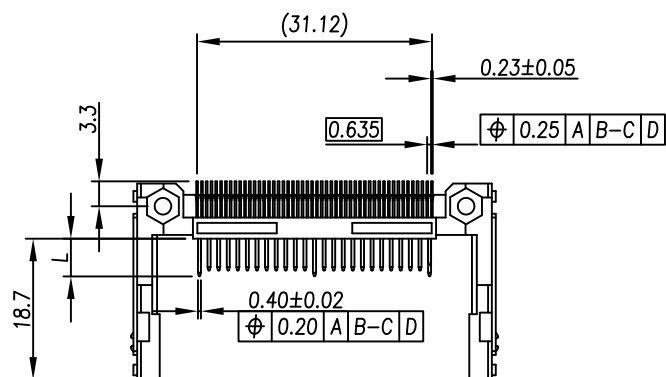

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±




ORDER INFORMATION

CFC-PW40CE221-50-LF

SERIES TYPE 2 50WAY LEADFREE
MALE EAR C TYPE NORMAL
90°SMT POST TO POST 40.16mm
STANDOFF 2.0mm



DESCRIPTION: CF CARD CONN. TYPE1,2 STAND-OFF 2.0mm NORMAL TYPE

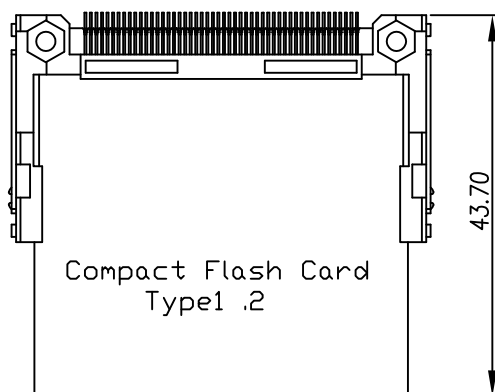

CARD INSERTION

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE: 40 mΩ max.
 INSULATION RESISTANCE: 1000M Ω min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

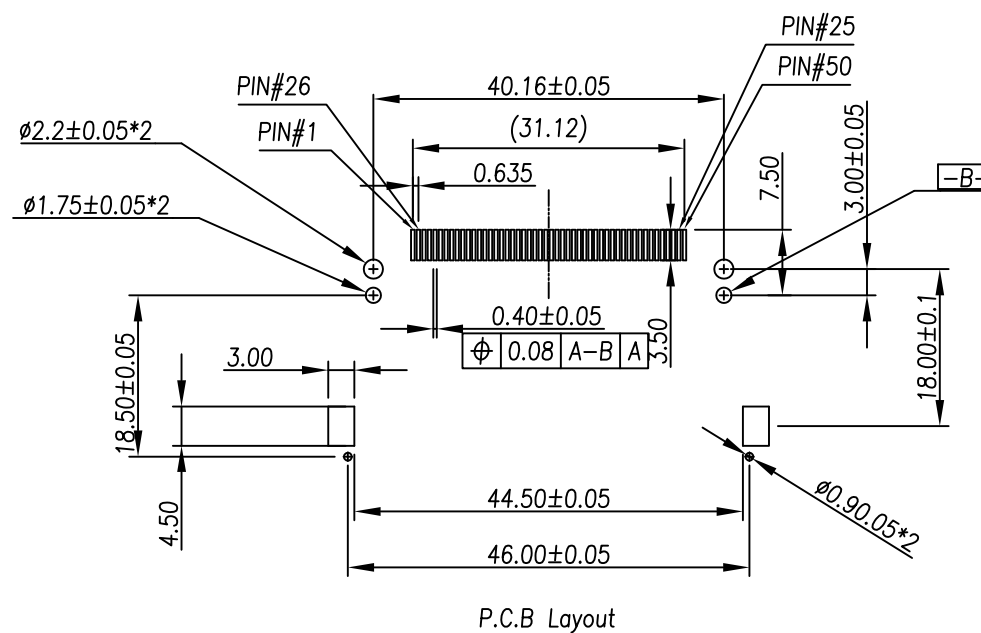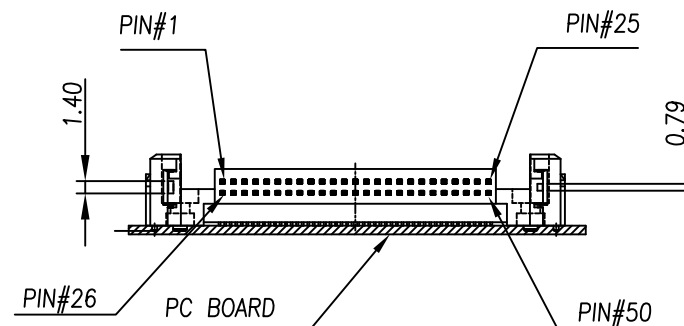

P.C.B Layout

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION



ORDER INFORMATION

CFC-PW40CE221-50-LF

SERIES TYPE 2 50WAY LEADFREE
 MALE EAR C TYPE NORMAL
 90°SMT POST TO POST 40.16mm
 STANDOFF 2.0mm

DESCRIPTION: CF CARD CONN. TYPE1,2 STAND-OFF 2.0mm NORMAL TYPE