
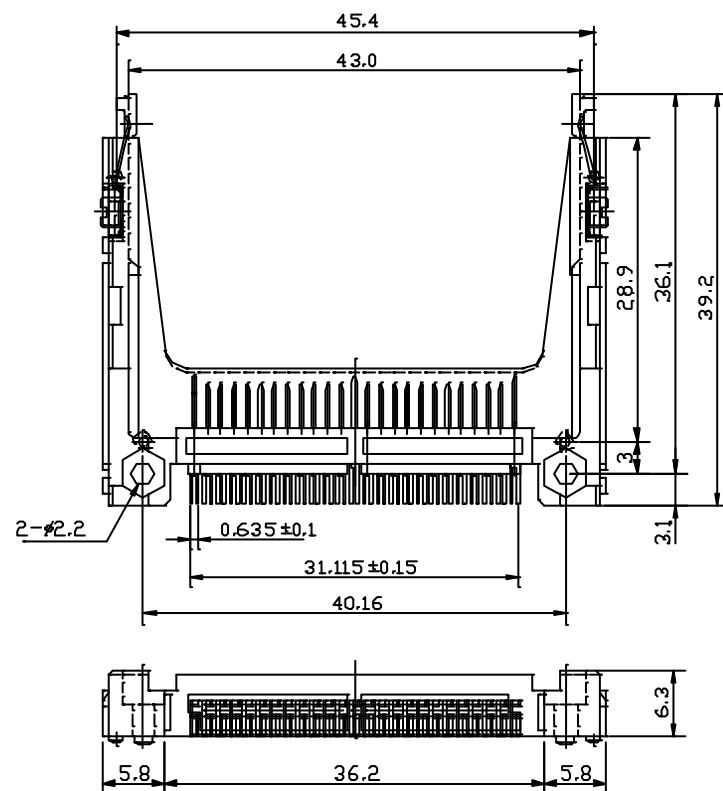


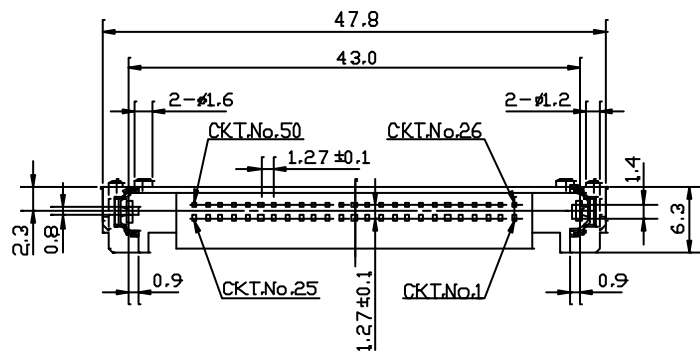

#### NOTES:

#### MATERIAL

Insulator: Glass Reinforced LCP UL94V-0


Contacts: Brass Alloy

Mount ear: Brass ; Tin plated overall

#### CONTACT PLATING

Contact area: Gold plating over 40u" Nickel

Solder tail area: 100u" tin plating over 40u" Nickel

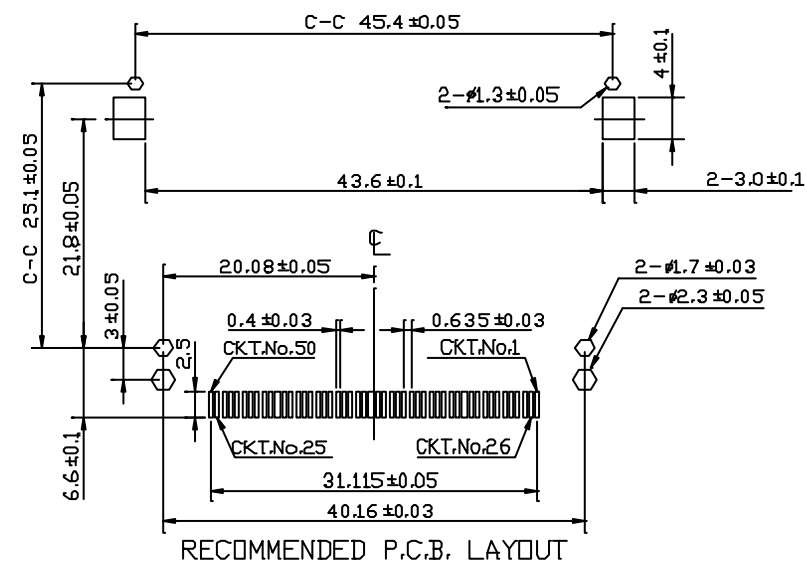

#### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.  $\pm$   
X.  $\pm$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$



#### ORDER INFORMATION

CFC-PW40CE201H-50-LF

SERIES

MALE

90°SMT

TYPE 2

EAR

C TYPE

HOOK

NORMAL

STANDOFF

50WAY

0.0mm

POST TO POST 40.16mm

LEADFREE

DESCRIPTION: CF CARD HEADER SMT 50P TYPE II (B0)