




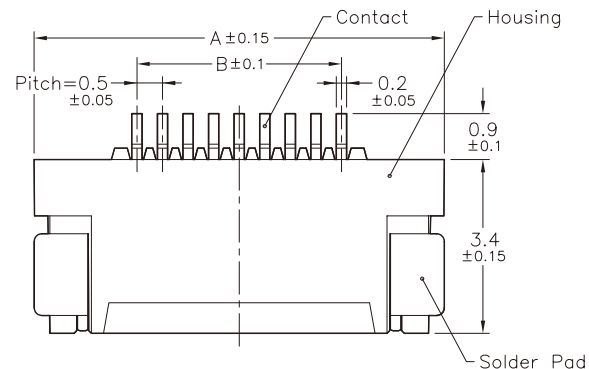


NOTE:


- 1.MATERIAL:
HOUSING:THERMOPLASTIC
CONTACTS:COPPER ALLOY
- 2.PLATING:
CONTACTS:SEE ORDERING INFORMATION
SOLDER PAD:TIN OVER NICKEL
- 3.RATING:
OPERATING VOLTAGE:50V
CURRENT RATING:0.4A
OPERATING TEMPERATURE:-55°C ~ +85°C

No.of Contacts	DIM. A	DIM. B	DIM. C
4	5.53	1.5	2.6
5	6.03	2	3.1
6	6.53	2.5	3.6
7	7.03	3	4.1
8	7.53	3.5	4.6
9	8.03	4	5.1
10	8.53	4.5	5.6
11	9.03	5	6.1
12	9.53	5.5	6.6
13	10.03	6	7.1
14	10.53	6.5	7.6
15	11.03	7	8.1
16	11.53	7.5	8.6
17	12.03	8	9.1
18	12.53	8.5	9.6
19	13.03	9	10.1
20	13.53	9.5	10.6
21	14.03	10	11.1
22	14.53	10.5	11.6
26	15.03	11	12.1
24	15.53	11.5	12.6
25	16.03	12	13.1
26	16.53	12.5	13.6
27	17.03	13	14.1
28	17.53	13.5	14.6
29	18.03	14	15.1
30	18.53	14.5	15.6
31	19.03	15	16.1
32	19.53	15.5	16.6
33	20.03	16	17.1
34	20.53	16.5	17.6
35	21.03	17	18.1
36	21.53	17.5	18.6
37	22.03	18	19.1
38	22.53	18.5	19.6
39	23.03	19	20.1
40	23.53	19.5	20.6
41	24.03	20	21.1
42	24.53	20.5	21.6
43	25.03	21	22.1
44	25.53	21.5	22.6
45	26.03	22	23.1
46	26.53	22.5	23.6
47	27.03	23	24.1
48	27.53	23.5	24.6
49	28.03	24	25.1
50	28.53	24.5	25.6


No.1 Contact Point

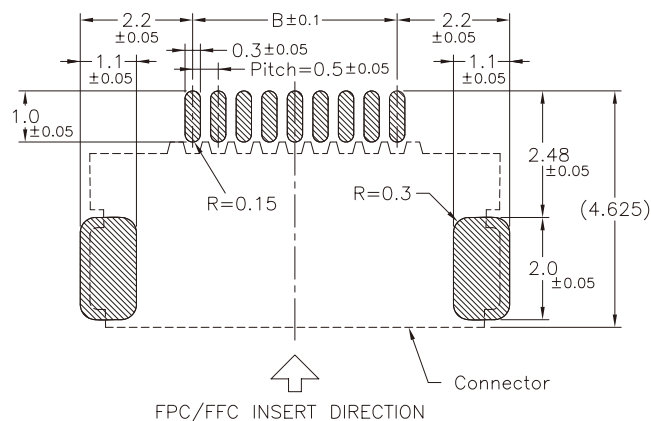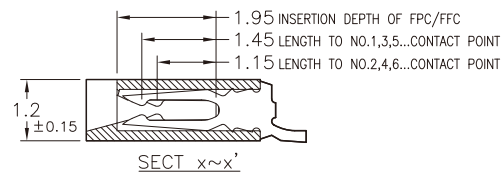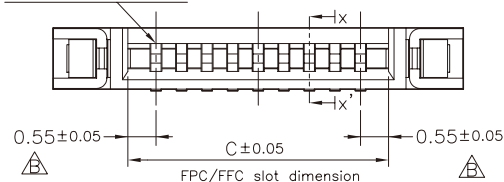

PCB Layout

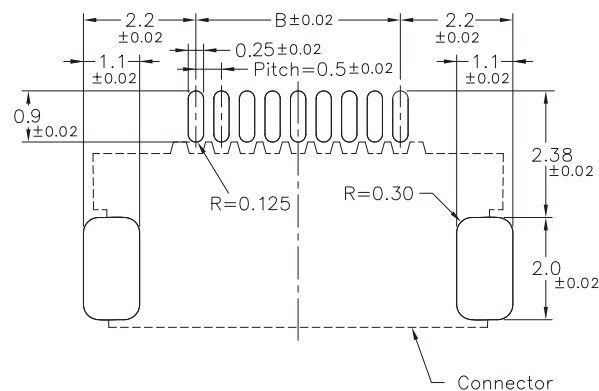

RECOMMENDED METAL MASK PATTERN (THICKNESS 0.1mm)

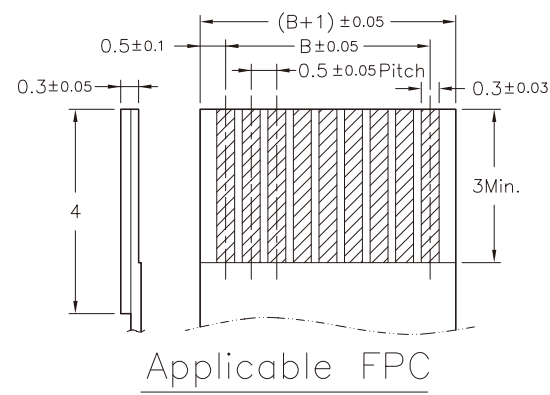

Applicable FPC

本產品不含有環境管理物質規定之有害物質

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


DATE

SIZE A4

SCALE 1:1

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FPV-WL2E12-xx-LF

SERIES
90°SMT
LEADFREE
04-50 WAY
HIGH 1.20mm
EAR
DUAL CONTACT
NON ZIF

DESCRIPTION: