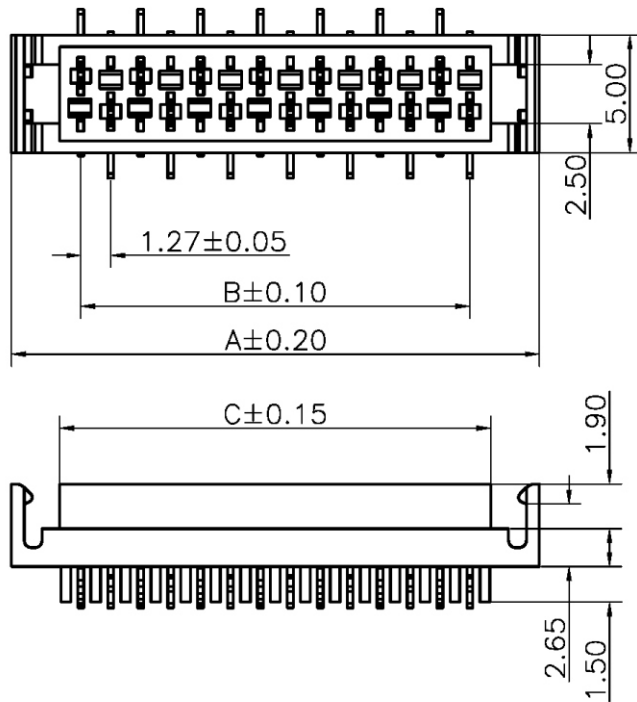


Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1,000M ohm. Min.

Withstanding Voltage:500V AC For One Minute

Operating Temperature Range:-40°C ~ +105°C

Material and Finish


Insulator:High Temp. Plastic (UL94V-0)

Contact:Copper Alloy

Plated:Tin Plated

How to Order

Pos	A	B	C	Pos	A	B	C
4	9.70	3.81	5.60	16	24.94	19.05	20.84
6	12.24	6.35	8.14	18	27.48	21.59	23.38
8	14.78	8.89	10.68	20	30.02	24.13	25.92
10	17.32	11.43	13.22	22	32.56	26.67	28.46
12	19.86	13.97	15.76	24	35.10	29.21	31.00
14	22.40	16.51	18.30	26	37.64	31.75	33.54

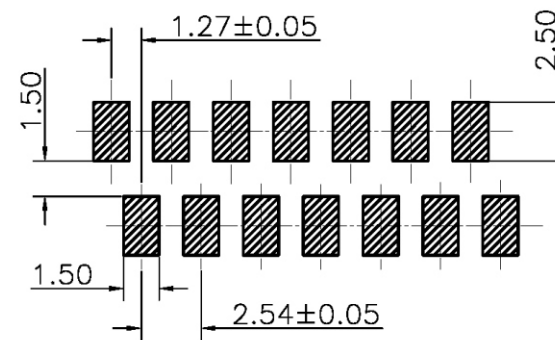

PCB Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE


X.±

.X±

.XX±

.XXX±

ANG±



ORDER INFORMATION

MIM-SVL-xx-LF
SERIES
LEADFREE
04~26WAY
LATCH
180°SMT
FEMALE

DESCRIPTION: