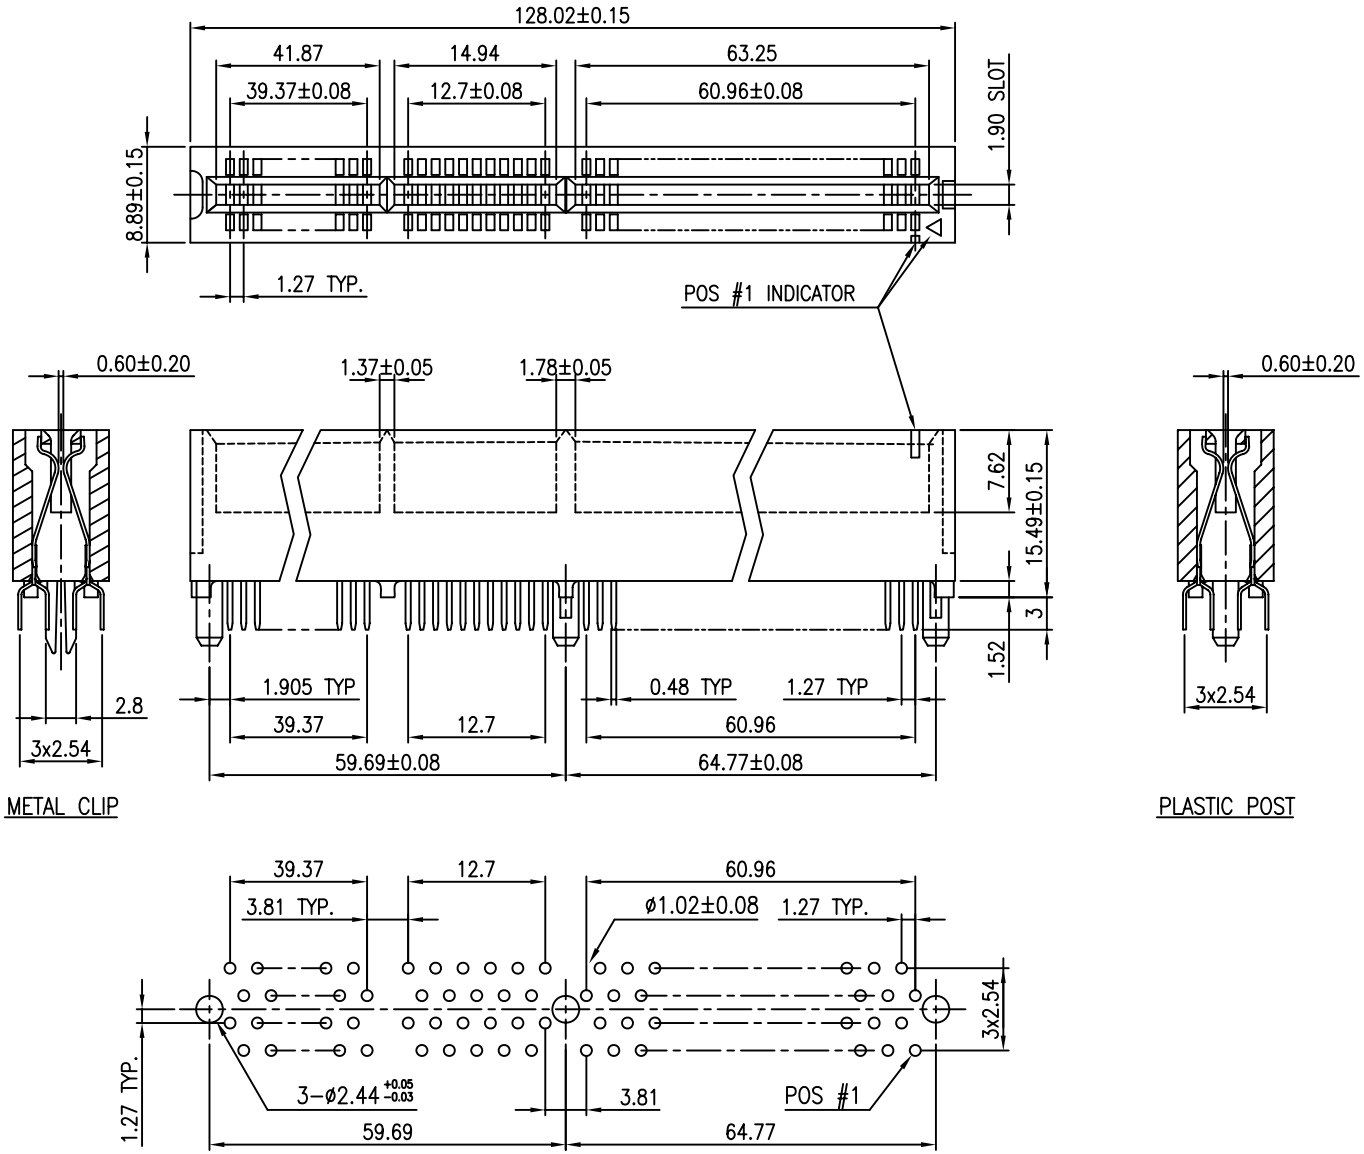

MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC, UL94V-0 RATED.
CONTACT: COPPER ALLOY.
PLATING: MATING AREA- GOLD, SOLDER AREA- TIN/LEAD.

ELECTRICAL

VOLTAGE RATING: 250 VAC RMS.
CURRENT RATING: 3 AMP.
INSULATION RESISTANCE: 1,000 MEGOHMS MIN.
CONTACT RESISTANCE: 30 MILLIOHMS MAX.

MECHANICAL

CONTACT RETENTION: 460 GRAMS MIN PER CONTACT.
INSERTION FORCE: 230 GRAMS MAX PER CONTACT PAIR.
WITHDRAWAL FORCE; 15 GRAMS MIN PER CONTACT PAIR

ENVIRONMENTAL

TEMPERATURE RANGE: -55° TO +85°.

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	



ORDER INFORMATION

PCI-D-184V5-LF

SERIES | DIP 180° | 184 WAY | 5.0V | LEADFREE

DESCRIPTION: 64 BIT PCI CARDEDGE, 5.0V