



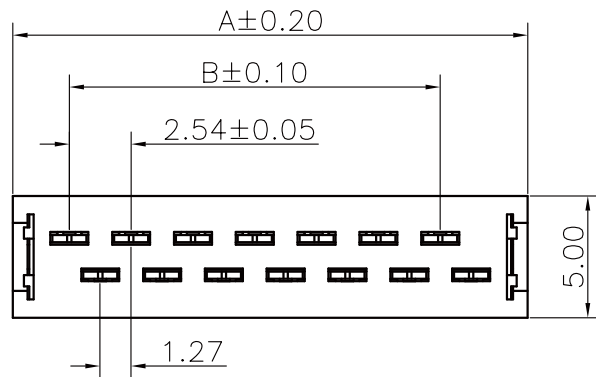

Circuits	Dimension	
	A	B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86
22	31.31	25.40
24	33.85	27.94
26	36.39	30.48



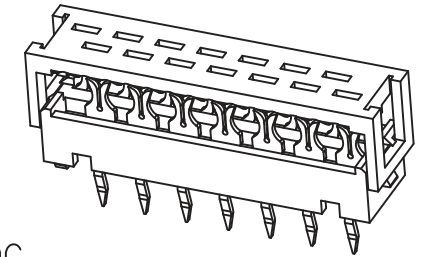


Specifications:

Current rating:1.0A AC,DC
Voltage rating:30V AC, DC
Contact resistance:20m ohm Max
Insulation resistance:1000M ohm Min
Withstanding voltage:AC 500V AC/minute
Operating Temperature Range:-40°C ~ +105°C

Materials:

Insulator:High Temp Plastic UL94V-0
Contact material:Phosphor Bronze
Finish:Tin Plated

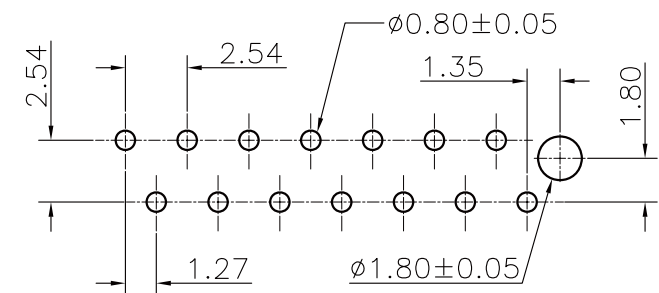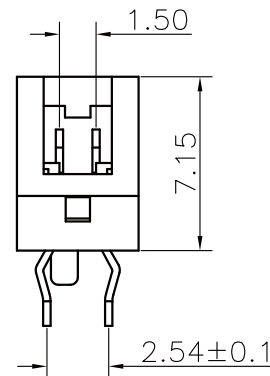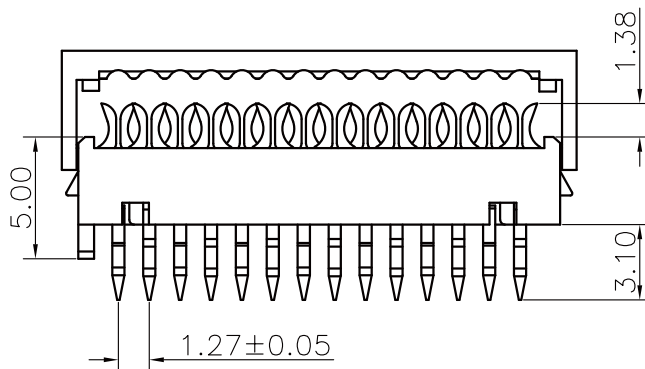

PCB Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

MIM-IP-xx-LF
SERIES | LEADFREE
04~26WAY
IDC PLUG

DESCRIPTION: 2.54mm IDC Connector