

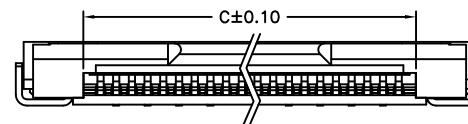

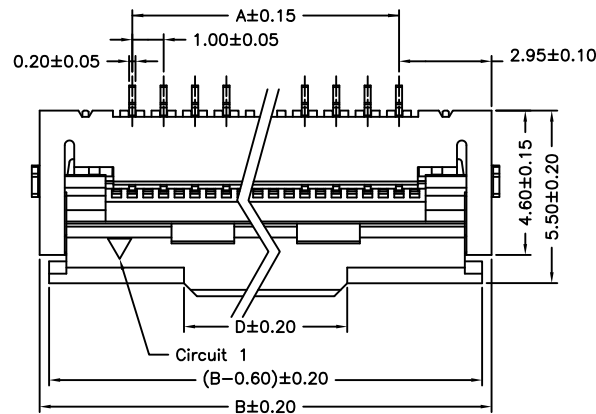
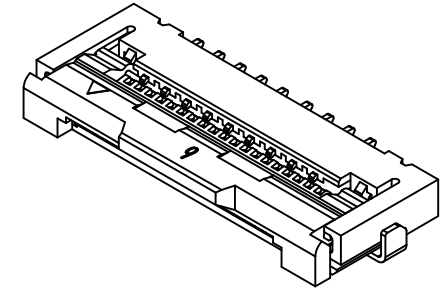
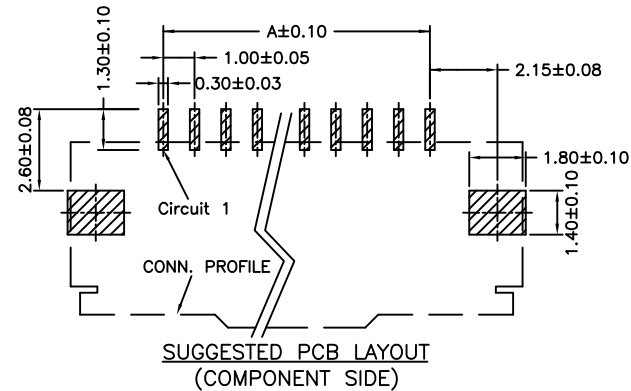
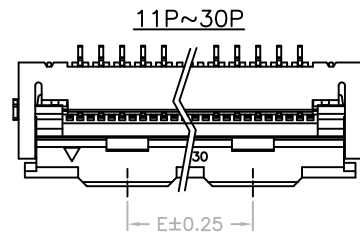


FPC/FFC Connector 1.0mm Press C Type H=2.0mm

SPECIFICATIONS

Current Rating: 0.5A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 250V AC/minute
Contacts: Phosphor Bronze/Tin-plated
Solder Tabs: Phosphor Bronze/Tin-plated
Housing: Nylon 6T,UL94V-0,Natural(Beige)
Cover: Nylon 6T,UL94V-0,Natural(Black)



Ordering Information & Dimensions

PART NO.	Dimensions				
	A	B	C	D	E
FPA-WHB20-05	4.00	9.90	6.10	4.70	
FPA-WHB20-06	5.00	10.90	7.10	4.70	
FPA-WHB20-07	6.00	11.90	8.10	5.20	
FPA-WHB20-16	15.00	20.90	17.10	5.20	8.50
FPA-WHB20-22	21.00	26.90	23.10	5.20	14.50
FPA-WHB20-25	24.00	29.90	26.10	5.20	6.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FPA-WHB20-xx-LF
SERIES
LEADFREE
05~25WAY
HIGH 2.0mm
BOTTOM CONTACT
HINGED ZIF
90°SMT

DESCRIPTION: FPC/FFC Connector 1.0mm Press C Type H=2.0mm