


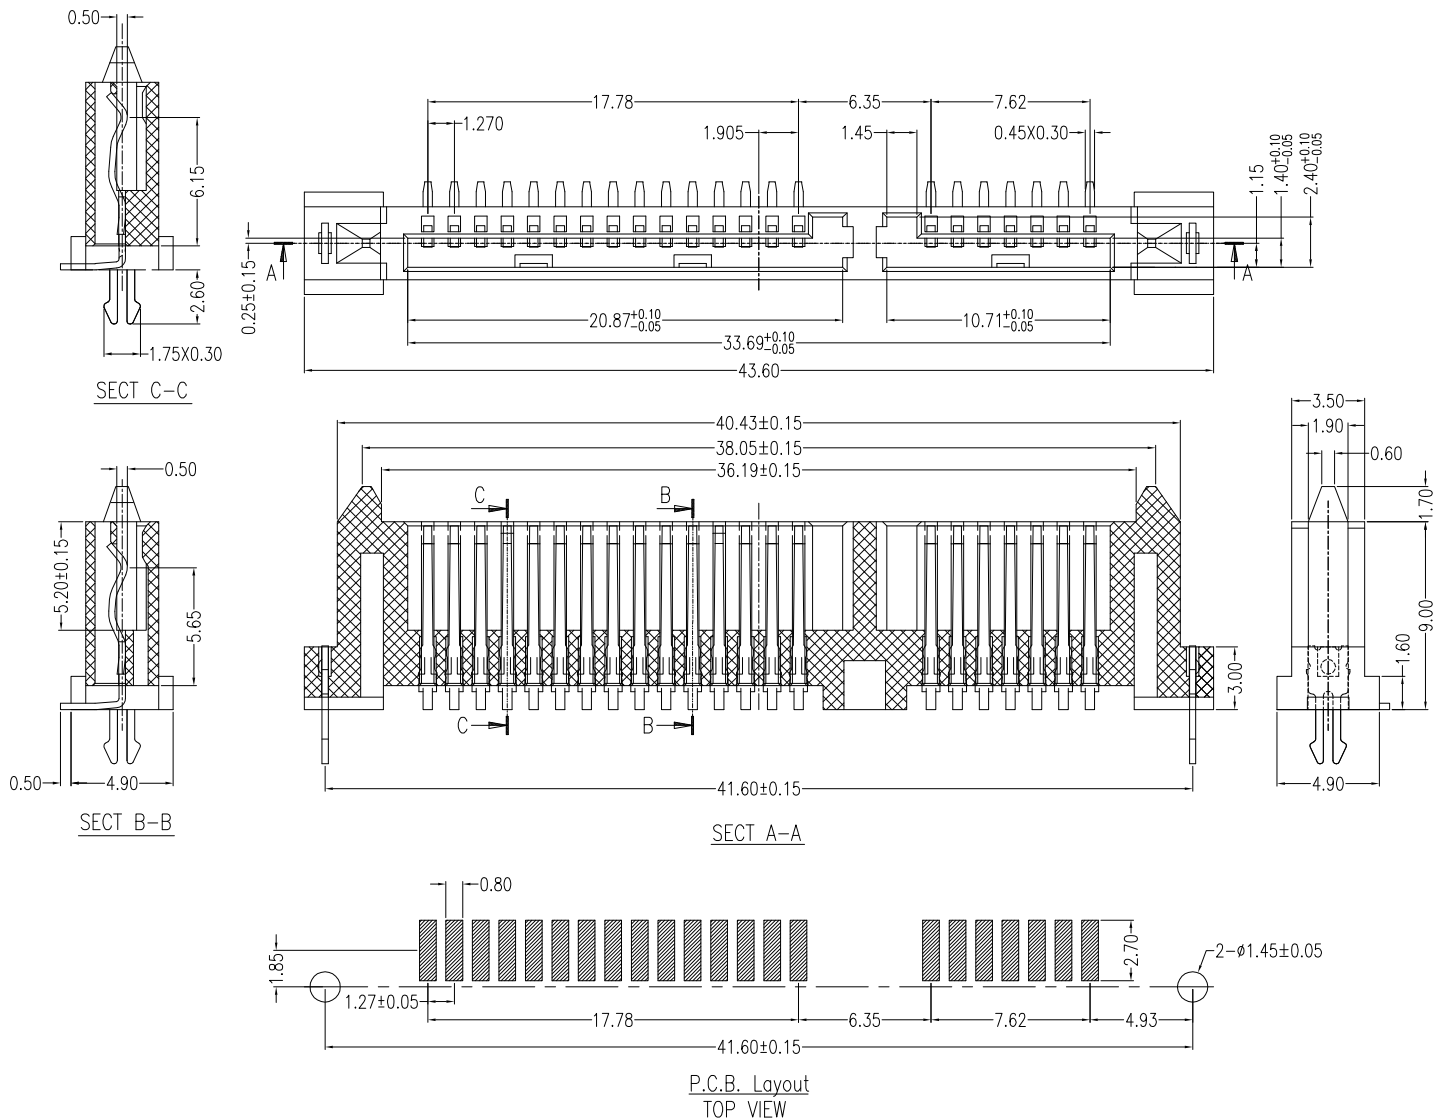

NOTES

*Material

Housing: LCP, UL 94V-0 Rated; Color:Black.
 Contact: Phosphor Bronze
 Clip: Brass
 Plating: Gold Plating Over Nickel on Contact Area;
 Tin/Lead Plating on Terminal.

*Electrical Specification

Operation Voltage: 100 VAC Max.
 Current Rating: 1.5 Ampere Per Contact
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Dielectric Withstanding Voltage: 500 VAC

*Environmental

Operating Temperature: -55°C to +125°C

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION



ORDER INFORMATION

SATA-SV09Z-7+15-LF

SERIES | CLIP | LEADFREE
 7+15 WAY
 HIGH 9.0mm
 180°SMT
 FEMALE

DESCRIPTION: SATA 7+15Pins (直立式SMT 母座)