


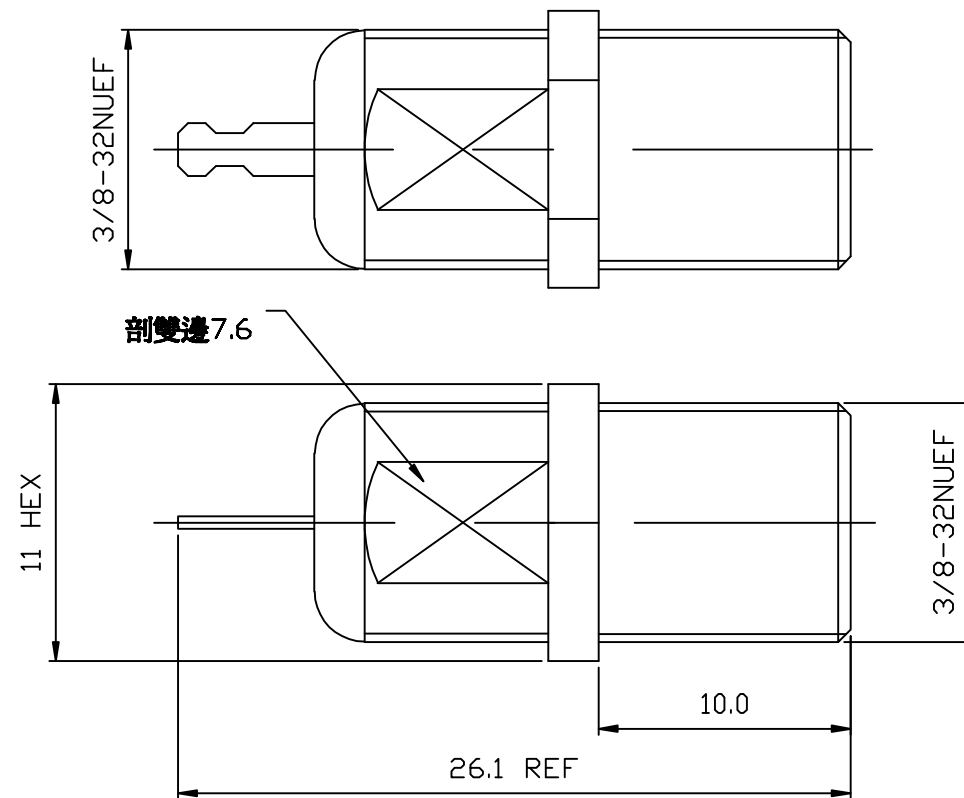

Impedance: 75 OHM
Frequency: 2G

5	WASHER	IRON	NICKEL	1
4	NUT	IRON	NICKEL	1
3	INSULATOR	P.P	WHITE	1
2	PIN	BRASS	TIN	1
1	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0.5-5	=±0.2
5-30	=±0.4
30-120	=±0.6
120-315	=±1
315-1000	=±1.6
1000-2000	=±2.4



ORDER INFORMATION

F-JSPN-75-LF
SERIES T T LEADFREE
75 OHM
PANEL
SOLDER
JACK

DESCRIPTION: F CONNECTOR