
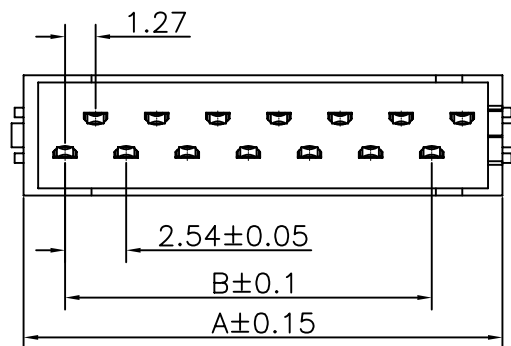
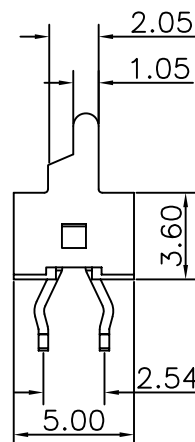


Mating Height Draw.

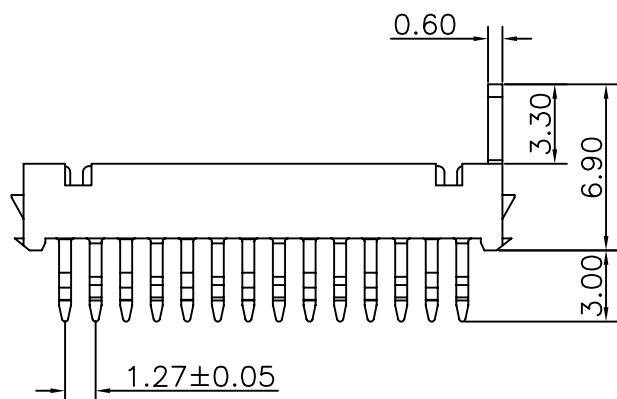

Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:AC 500V AC/minute


Operating Temperature Range:-40°C ~ +105°C

Material and Finish


Insulator:High Temp. Plastic (UL94V-0)

Contact material:Phosphor Bronze

Finish:Tin Plated



Circuits	Dimension		Circuits	Dimension		Circuits	Dimension	
	A	B		A	B		A	B
4	7.20	2.54	12	17.36	12.70	20	27.52	22.86
6	9.74	5.08	14	19.90	15.24	22	30.06	25.40
8	12.28	7.62	16	22.44	17.78	24	32.60	27.94
10	14.82	10.16	18	24.98	20.32	26	35.14	30.48

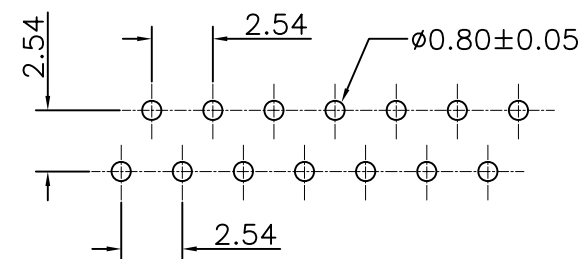

PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±



SIZE A4

PPOJECTION

ORDER INFORMATION

MIM-BD-xx-LF
SERIES LEADFREE
04~26WAY
DIP 180°
BOX

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 2.54mm PCB Connector A Male Type